

# MULTIS L50

## Digital panel meter

three-phases - via CT up to 6000 A dimensions 96 x 96 mm



MULTIS L50

### The solution for

- > Industry
- > Infrastructure



### Strong points

- > Large backlit LCD display
- > Direct display of multimeasurement and metering values
- > RS485 MODBUS communication
- > Inputs/Output for control/command or pulses

### Conformity to standards

- > IEC 62053-21 class 1
- > IEC 62053-23 class 2



### Function

The MULTIS L50 is a panel mounted digital meter displaying multi-measurement and energy values directly on its large backlit LCD display. It is designed for utilisation on three-phase or single-phase networks with connection via CT and is suitable for applications of up to 6000 A. The product can be configured by the user via the keypad and the display.

### Advantages


#### Easy to use

Thanks to its large backlit LCD display and its multiple viewing screens with direct pushbutton access, MULTIS L50 provide clear readings and are easy to use. They directly display a number of multi-measurement and metering values.

#### Advanced functionalities

The MULTIS L50 offers input/output functions as standard and has a pulse output or RS485 MODBUS communication output.

### Principle diagram

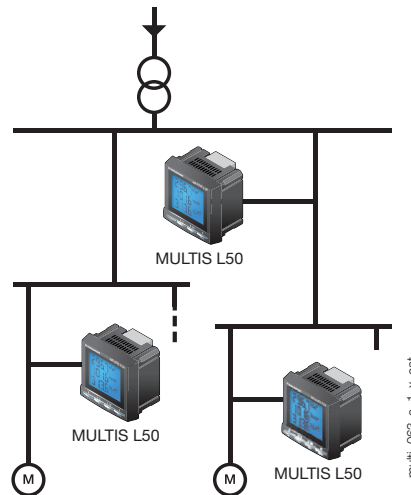

## Functions

#### Multi-measurement

- Currents
  - instantaneous: I1, I2, I3, In
  - maximum average: I1, I2, I3, In
- Voltages & frequency
  - instantaneous: V1, V2, V3, U12, U23, U31, F
- Power
  - instantaneous: 3P, ΣP, 3Q, ΣQ, 3S, ΣS
  - maximum average: ΣP, ΣQ, ΣS
  - unbalance: U unb
- Power factors
  - instantaneous: 3PF, Σ

#### Metering

- Active energy: ± kWh
- Reactive energy: ± kvarh
- Hours: ⌚

#### Harmonic analysis

- Total harmonic distortion (level 51)
  - Currents: thd I1, thd I2, thd I3
  - Phase-to-neutral voltage: thd V1, thd V2, thd V3
  - Phase-to-phase voltage: thd U12, thd U23, thd U31

#### Communications<sup>(1)</sup>

RS485 with MODBUS protocol

#### Output

- Remote command of device
- Pulse report

#### Inputs

- Remote status device


<sup>(1)</sup> Available as an option (see the following pages).

### Front panel



1. Backlit LCD display.
2. Direct access key for currents (instantaneous and max. values), current THD.
3. Direct access key for voltages, frequency and voltage THD.
4. Pushbutton for active, reactive, and apparent power (instantaneous and max. values) and power factor.
5. Direct access key for energies, hour meter and programming menu.

### Case

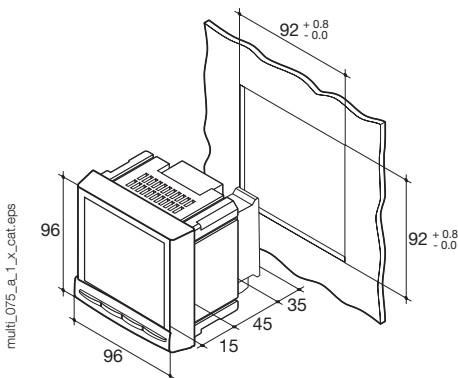

|  |                             |
|--|-----------------------------|
| Type                                       | panel mounting              |
| Dimensions W x H x D                       | 96 x 96 x 60 mm             |
| Case degree of protection                  | IP30                        |
| Front degree of protection                 | IP52                        |
| Display type                               | backlit LCD display         |
| Terminal block type                        | fixed or plug-in            |
| Voltage and other connection cross-section | 0.2 ... 2.5 mm <sup>2</sup> |
| Current connection cross-section           | 0.5 ... 6 mm <sup>2</sup>   |
| Weight                                     | 400 g                       |

### Plug-in modules

#### MULTIS L50



#### 1 Output

- 1 output assignable to:
- Pulses: configurable (type, weight, duration) in kWh or kvarh.
  - Remote command of device.



#### Communication

RS485 link with JBUS / MODBUS protocol (speed up to 38400 bauds)




#### 3 inputs, 1 output

- 3 inputs assignable to:
- Remote status device.
- 1 output assignable to:
- Pulses: configurable (type, weight, duration) in kWh or kvarh.
  - Remote command of device.

### Accessories

#### Current transformers

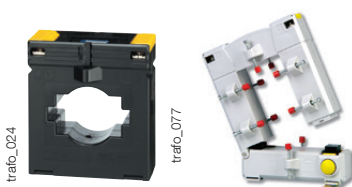

#### IP65 protection



#### Panel mounting kit for a 144 x 96 mm cut-out



# MULTIS L50

Digital panel meter


three-phases - via CT up to 6000 A dimensions 96 x 96 mm

## Electrical characteristics

| Current measurement (TRMS)                   |                           |
|--|---------------------------|
| Via CT primary                               | 9 999 A                   |
| Via CT secondary                             | 5 A                       |
| Measurement range                            | 0 ... 11 kA               |
| Input consumption                            | 0.6 VA                    |
| Measurement updating period                  | 1 s                       |
| Accuracy                                     | 1%                        |
| Permanent overload                           | 6 A                       |
| Intermittent overload                        | 10 I <sub>n</sub> for 1 s |
| Voltage measurements (TRMS)                  |                           |
| Direct measurement between phases            | 50 ... 500 VAC            |
| Direct measurement between phase and neutral | 28 ... 289 VAC            |
| Input consumption                            | ≤ 0.1 VA                  |
| Measurement updating period                  | 1 s                       |
| Accuracy                                     | 1%                        |
| Permanent overload                           | 800 VAC                   |
| Power measurement                            |                           |
| Measurement updating period                  | 1 s                       |
| Accuracy                                     | 1%                        |
| Power factor measurement                     |                           |
| Measurement updating period                  | 1 s                       |
| Accuracy                                     | 1%                        |
| Frequency measurement                        |                           |
| Measurement range                            | 45 ... 65 Hz              |
| Measurement updating period                  | 1 s                       |
| Accuracy                                     | 0.1 %                     |

| Energy accuracy                      |                           |
|--------------------------------------|---------------------------|
| Active (according to IEC 62053-21)   | Class 1                   |
| Reactive (according to IEC 62053-23) | Class 2                   |
| Auxiliary power supply               |                           |
| Alternating voltage                  | 110 ... 250 VAC           |
| AC tolerance                         | ± 10 %                    |
| Direct voltage                       | 120 ... 250 VDC           |
| DC tolerance                         | ± 10%                     |
| Frequency                            | 50 / 60 Hz                |
| Consumption                          | 10 VA                     |
| Pulse or alarm output                |                           |
| Number                               | 1                         |
| Type                                 | 100 VDC - 0.5 A - 10 VA   |
| Max. number of operations            | ≤ 10 <sup>8</sup>         |
| Inputs                               |                           |
| Number                               | 3                         |
| Power supply                         | 10 ... 30 VDC             |
| Minimum signal width                 | 10 ms                     |
| Minimum duration between 2 pulses    | 18 ms                     |
| Type                                 | Phototransistors          |
| Communication                        |                           |
| Link                                 | RS485                     |
| Type                                 | 2 ... 3 half duplex wires |
| Protocol                             | MODBUS RTU                |
| MODBUS® speed                        | 1400 ... 38400 bauds      |
| Operating conditions                 |                           |
| Operating temperature                | - 10 ... + 55 °C          |
| Storage temperature                  | - 20 ... + 85 °C          |
| Relative humidity                    | 95 %                      |


## Terminals

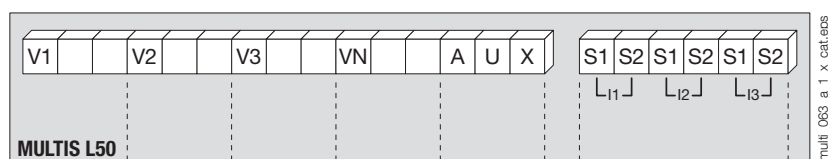

S1 - S2: current inputs.

AUX: auxiliary power supply U<sub>s</sub>.  
V1, V2, V3 & VN: voltage inputs.


### Communication module



RS485 link.


R = 120 Ω: selectable internal resistance for RS485 end of line termination.

### Output or alarm module



18 - 19: output n°1

### 3 inputs, 1 output module

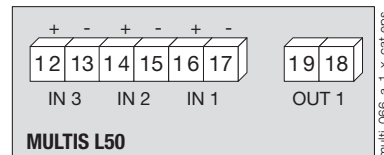


## Connection

### Recommendation:

- For IT earthing systems, it is recommended that the CT secondary is not connected to earth.
- When disconnecting the DIRIS, the secondary of each current transformer must be short-circuited. This operation can be carried out automatically by a SOCOMEC PT1, an accessory which is included in this catalogue. Please consult us.


### Low voltage balanced network

#### 3/4 wires with 1 CT

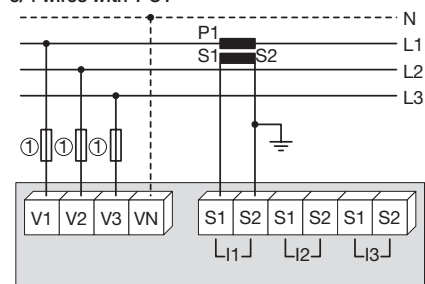


Use of 1 CT reduces by 0.5% the accuracy of the phases, the current of which is worked out by vector calculation.  
1. Fuses 0.5 A gG / 0.5 A class CC.

#### Single-phase

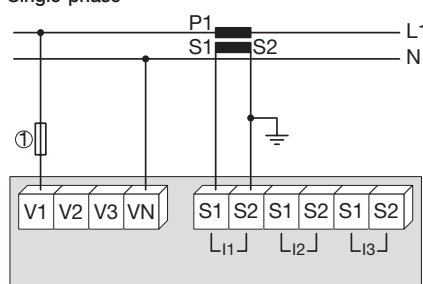

1. Fuses 0.5 A gG / 0.5 A class CC.


#### Two-phase

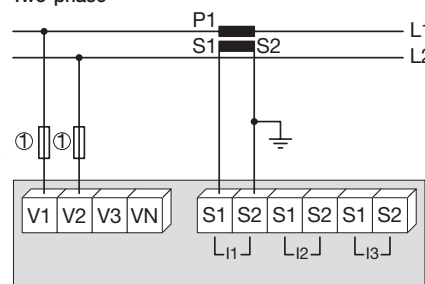

1. Fuses 0.5 A gG / 0.5 A class CC.


#### Low voltage unbalanced network

##### 3/4 wires with 3 CTs

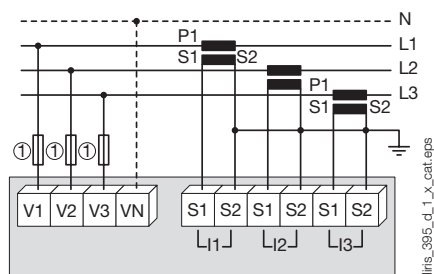

1. Fuses 0.5 A gG / 0.5 A class CC.


##### 3 wires with 2 CTs

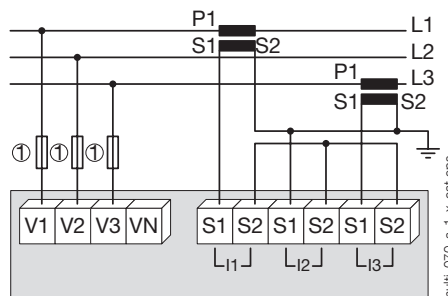

Use of 2 CTs reduces by 0.5% the accuracy of the phases, the current of which is worked out by vector calculation.

1. Fuses 0.5 A gG / 0.5 A class CC.

##### 3 wires with 2 CTs

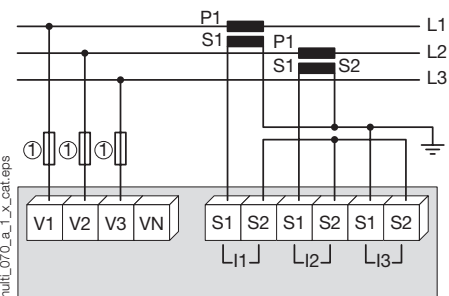


Use of 2 CTs reduces by 0.5% the accuracy of the phases, the current of which is worked out by vector calculation.


1. Fuses 0.5 A gG / 0.5 A class CC.

#### Additional information

##### Communication via RS485 link



##### AC & DC auxiliary power supply



1. Fuses 0.5 A gG / 0.5 A class CC.

#### References

| Basic device  |  | MULTIS L50                    |
|---|--|-------------------------------|
| MULTIS L50  |  | Reference<br>192J 9120        |
| Optional plug-in modules  |  | Reference                     |
| 1 output  |  | 4825 0080                     |
| RS485 MODBUS® communication   |  | 4825 0082                     |
| 3 inputs, 1 output  |  | 4825 0083                     |
| Accessories   |  |                               |
| Description of accessories  |  | To be ordered in multiples of |
| IP65 protection   |  | 1                             |
| Panel mounting kit for a 144 x 96 mm cut-out                                      |  | 1                             |
| Fuse holder for the protection of voltage inputs (type RM) 3 poles                |  | 4                             |
| Fuse holder for the protection of the auxiliary supply (type RM) 1 pole + neutral |  | 6                             |
| Fuse type gG 10x38 0.5 A  |  | 10                            |
| Ferrite to be associated with communication modules                               |  | 1                             |
| Current transformer range   |  | 1                             |
|   |  | Reference                     |
|   |  | 4825 0089                     |
|   |  | 4825 0088                     |
|   |  | 5601 0018                     |
|   |  | 5601 0017                     |
|   |  | 6012 0000                     |
|   |  | 4899 0011                     |
|   |  | See "TE sensors" pages        |

#### Expert Services

- > Study, definition, advice, implementation, maintenance and training... Our experts "Expert Services" offer complete support for the success of your project.

