

Photo-electric sensors - Miniature design




NPN - M8 Connector : XUM9ANXBM8
PNP - M8 Connector : XUM9APXBM8

NPN - 2 m Cable : XUM9ANXBL2
PNP - 2 m Cable : XUM9APXBL2

Polarised reflex



Package Content (Example)



<http://qr.tesensors.com/XU0007>

Scan the code to access this Instruction Sheet and all product information in different languages or you can visit our website at: www.tesensors.com

We welcome your comments about this document. You can reach us through the customer support page on your local website.

⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Disconnect all power before servicing equipment.
- Do not connect this device to AC power.
- The power voltage must not exceed the rated range.

Failure to follow these instructions will result in death or serious injury.


⚠ WARNING

IMPROPER SETUP OR INSTALLATION

- This equipment must only be installed and serviced by qualified personnel.
- Read, understand, and follow the compliance below, before installing the XUM Photo-electric sensor.
- Do not tamper with or make alterations on the unit.
- Comply with the wiring and mounting instructions.
- Check the connections and fastening during maintenance operations.
- The proper functioning of the XUM photoelectric sensor and its operating line must be checked regularly and according to the application (for example number of operations, level of environmental pollution, etc.).



Failure to follow these instructions can result in death, serious injury, or equipment damage.

Mounting and tightening torques

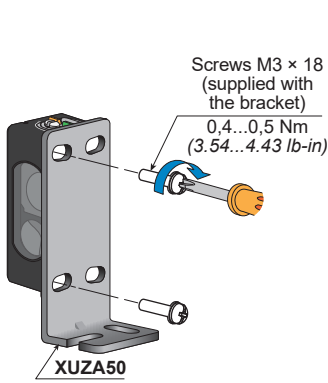

Screws M3 (not provided)
0,4...0,5 Nm
(3.54...4.43 lb-in)


Screws M3 x 18 (supplied with the bracket)
0,4...0,5 Nm
(3.54...4.43 lb-in)



0,2...0,4 Nm
(1.77...3.54 lb-in)




⚠ CAUTION
DETERIORATION OF PROTECTION DEGREE
Do not apply excessive torque on the sensor during the installation process.
Failure to follow these instructions can result in injury or equipment damage.

LEDs and settings


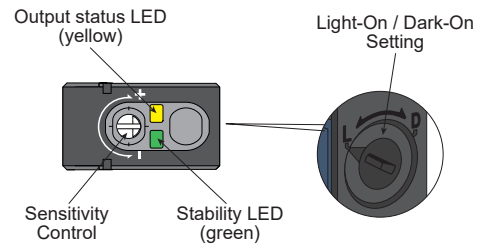


Wiring diagrams


M8 Connector - 4 pins



2 m Cable - 3 wires



Wiring precaution

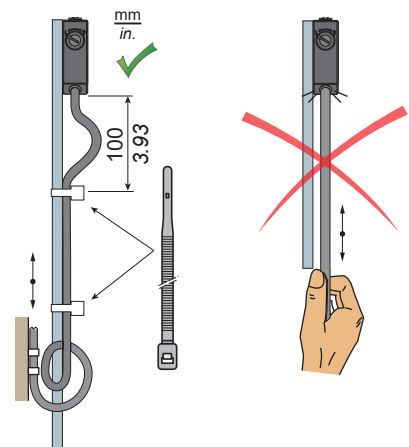

NOTICE
REDUCTION OF SERVICE LIFE
Do not pull on the sensor cable.
Failure to follow these instructions can result in equipment damage.





Electrical equipment should be installed, operated and maintained only by qualified personnel.
No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

© 2023 Schneider Electric. "All Rights Reserved."



Dimensions

mm
in.


1 mm = 0.0397 in.

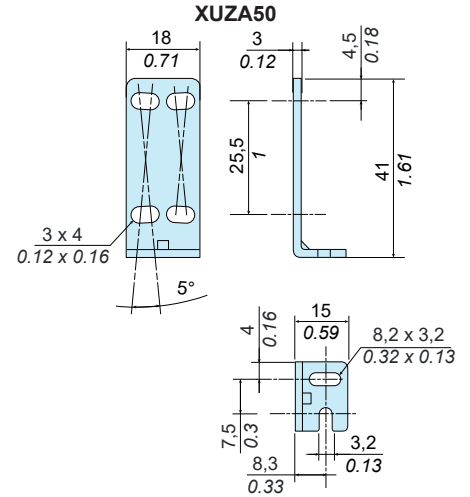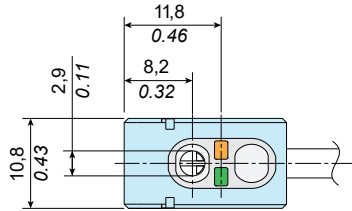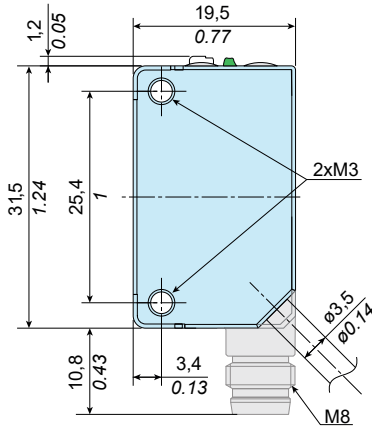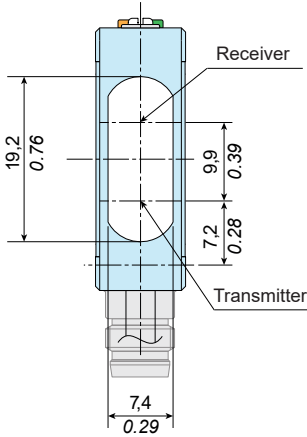




XUZASM04



XUZASM02




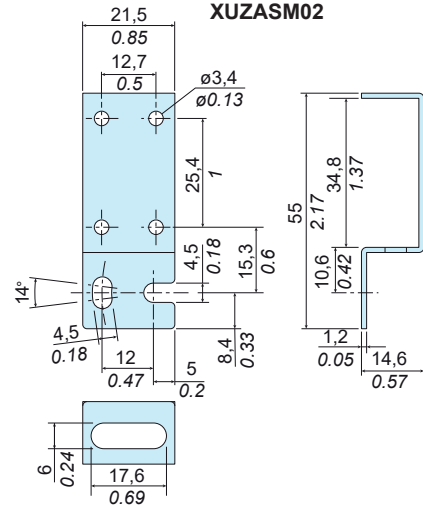


XUZASM03

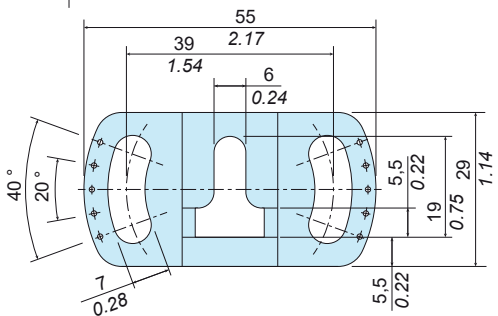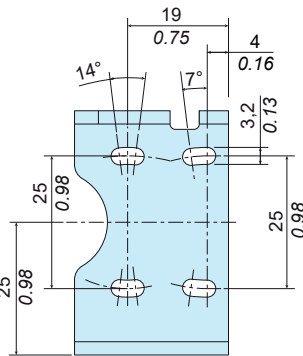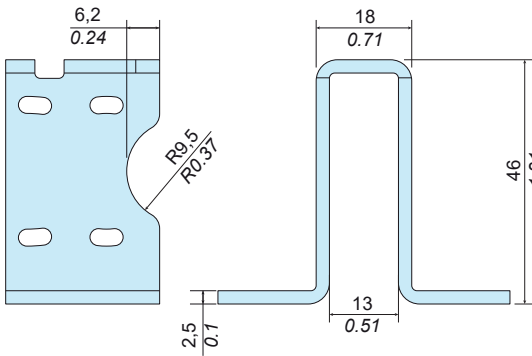


Accessories


Mounting Brackets (to order separately)

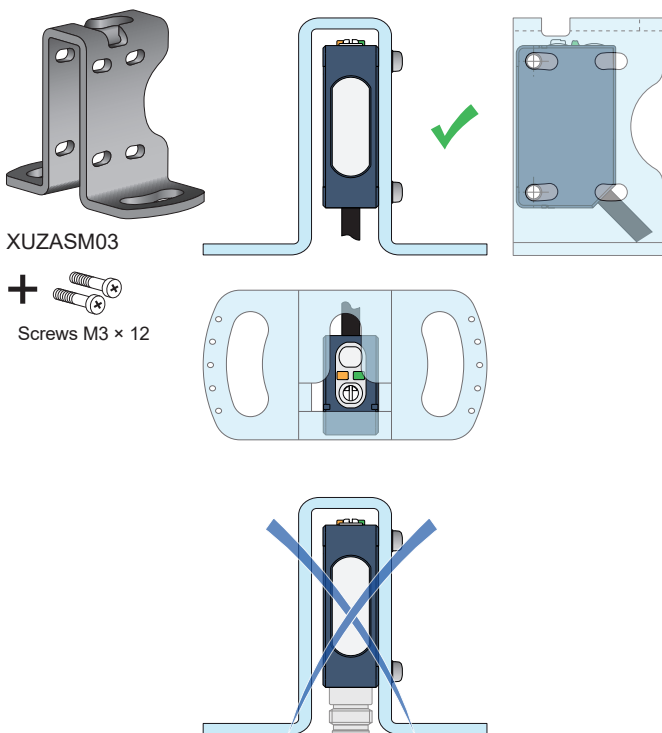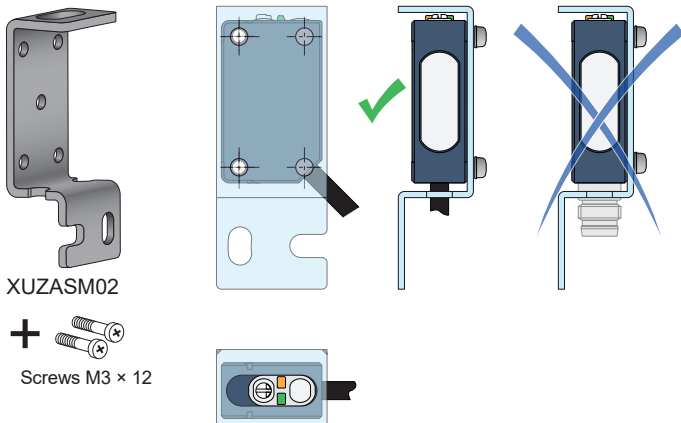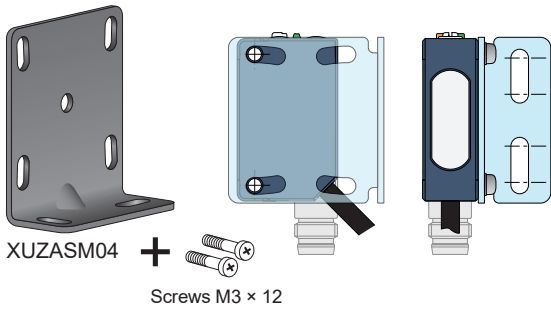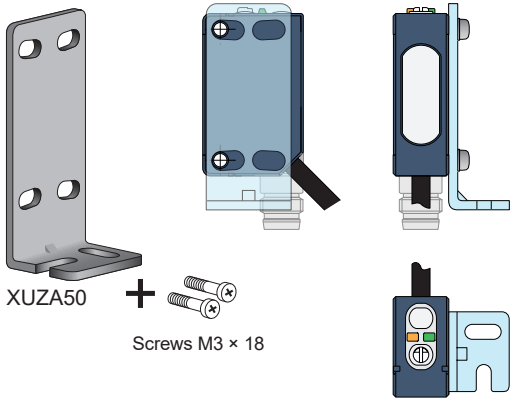

Reflector examples (to order separately)

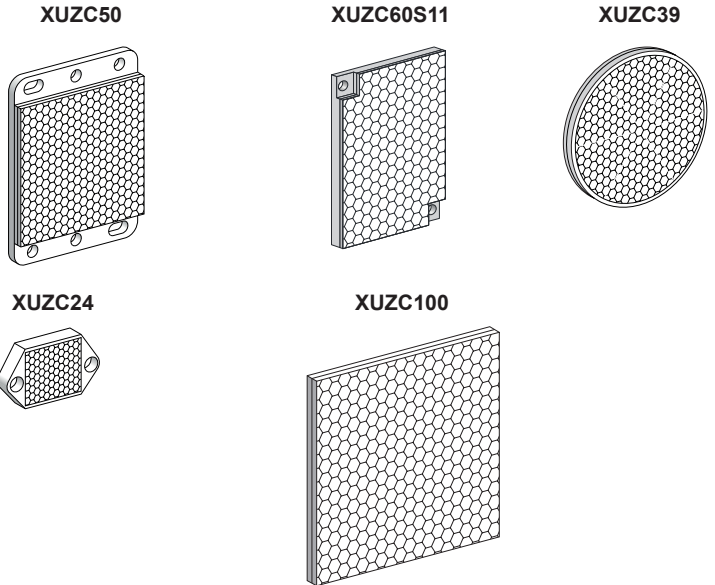

Reflectors Dimensions

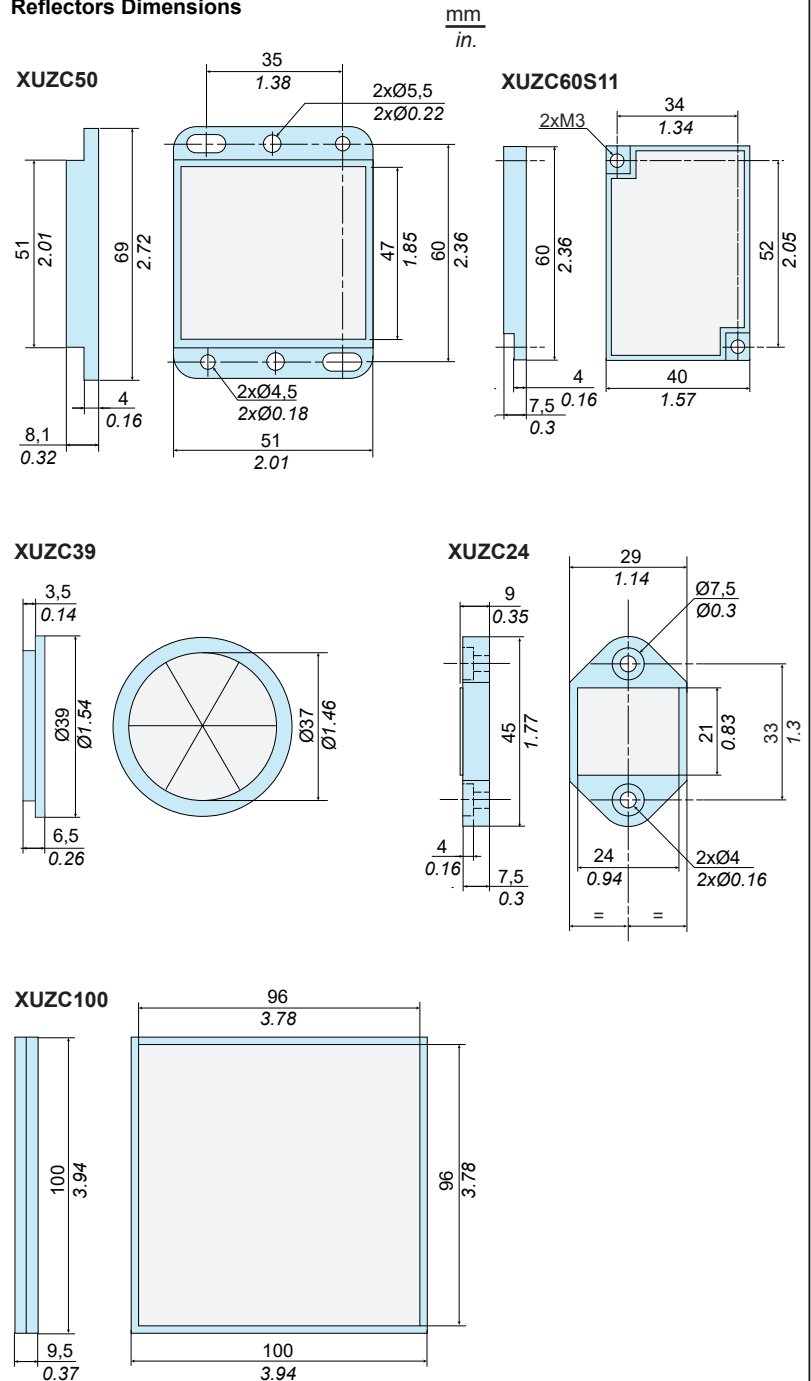


Pre-Wired connectors (examples)


PVC cable for general use
PUR cable for severe industrial environments

| Cable length | M8, 4 pins | | M8 - M12, 4 pins | | Jumper length | M8 - M12, 4 pins | |
|-----------------|--------------|-------------|------------------|-------------|----------------|------------------|----------------|
| | PVC | PUR | PVC | PUR | | PUR | PUR |
| 2 m / 6.56 ft. | XZCPV0941L2 | XZCP0941L2 | XZCPV1041L2 | XZCP1041L2 | 1 m / 3.28 ft. | XZCR1509041J1 | XZ CR1510041J1 |
| 5 m / 16.4 ft. | XZCPV0941L5 | XZCP0941L5 | XZCPV1041L5 | XZCP1041L5 | 2 m / 6.56 ft. | XZCR1509041J2 | XZCR1510041J2 |
| 10 m / 32.8 ft. | XZCPV0941L10 | XZCP0941L10 | XZCPV1041L10 | XZCP1041L10 | | | |

Sensor position adjustment


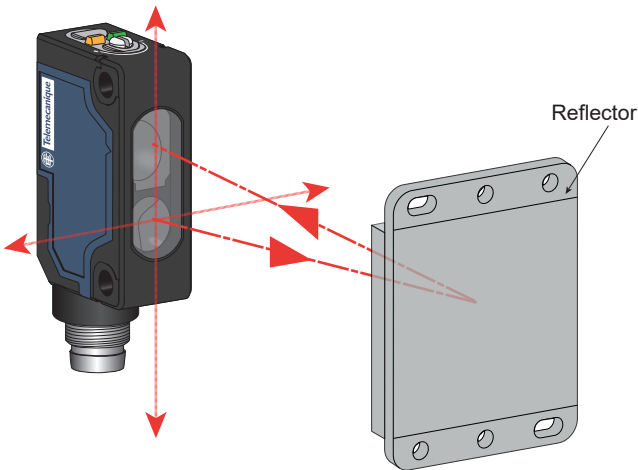


- Translate the sensor or reflector, up/down and left/right. When the setting is optimal, the stability indicator (green) is lit.
- Check sensor operation with the object and adjust the sensor, if necessary.




Stability LED (green):ON

Anti-interference for side by side and face to face (only for reflex model) mounting

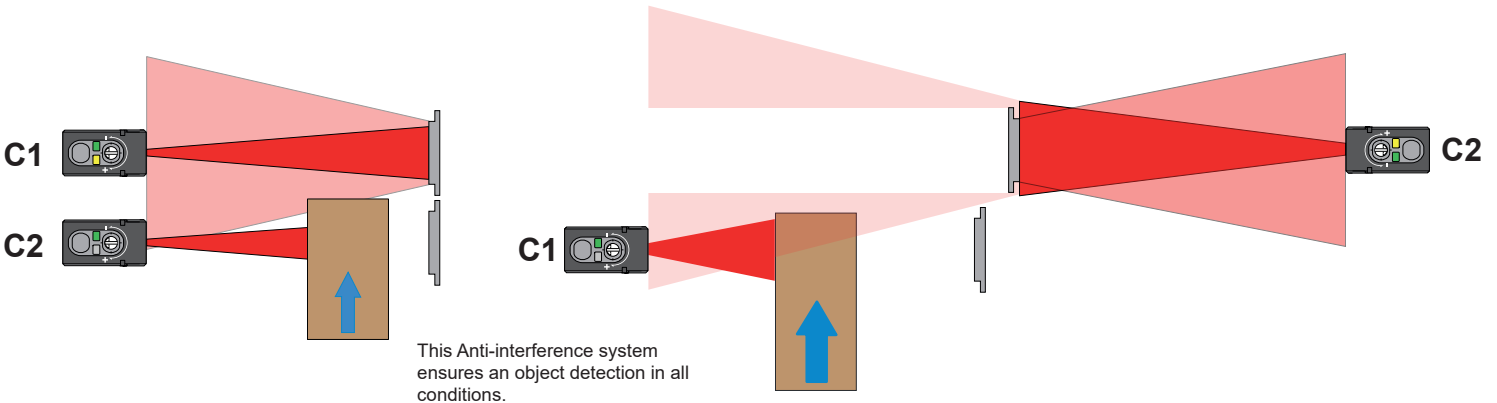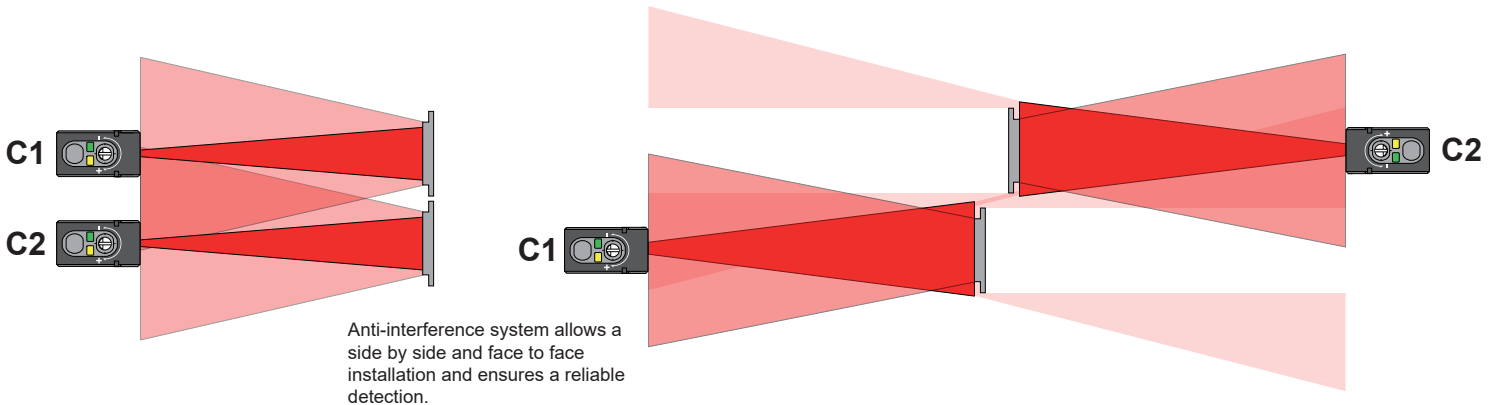

Output mode setting: Light-On or Dark-On (Light-On by default)

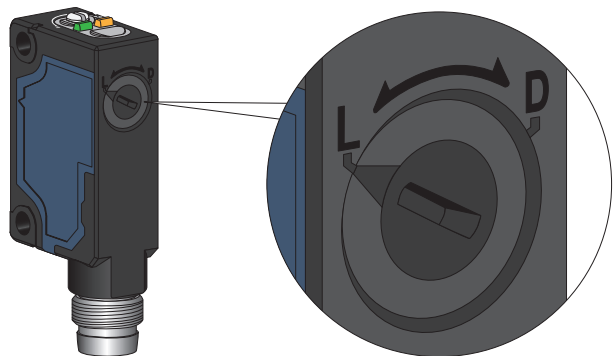

| | |
|---------------------------------------|------------------------------------|
| Light-On / Normally Closed | Dark-On / Normally Open |
| <p>The Output is ON</p> | <p>The Output is OFF</p> |
| <p>The Output is OFF</p> | <p>The Output is ON</p> |

Sensor sensitivity adjustment



For accurate detection, follow the configuration below. (eg. Reflective objects, with holes or small size to obstruct the reflection of the light beam).

| | Light-On | Dark-On |
|-------------------------------------|--|---|
| <p>0,8 x 4 mm / 0.03 x 0.16 in.</p> | <p>1-Connect the sensor to the power supply (see page 1 for the wire connection & page 7 for the power voltage). Before settings, start with the potentiometer at the minimum position (resulting to point A).</p> | <p>1-Connect the sensor to the power supply (see page 1 for the wire connection & page 7 for the power voltage). Before settings, start with the potentiometer at the minimum position (resulting to point A).</p> |
| | <p>2-Put the reflector in front of the sensor. Turn the potentiometer clockwise until the output led (yellow) switches on: the reflector is detected (resulting to point B).</p> <p>Continue to turn the potentiometer clockwise until the stability led (green) switches on (resulting to point C).</p> | <p>2-Put the reflector in front of the sensor. Turn the potentiometer clockwise until the output led (yellow) switches off: the reflector is detected (resulting to point B).</p> <p>Continue to turn the potentiometer clockwise until the stability led (green) switches on (resulting to point C).</p> |
| | <p>3-Put the object between the sensor and the reflector. Make sure the output led (yellow) switches off and the stability led (green) is on. This ensures a good stability of detection.</p> <p>The Sensor is set and ready to detect.</p> | <p>3-Put the object between the sensor and the reflector. Make sure the output led (yellow) switches on & the stability led (green) is on. This ensures a good stability of detection.</p> <p>The Sensor is set and ready to detect.</p> |


During the set up process, the output is acting as the yellow led

Detection curves


Angle - Polarized Retro-reflective XUM9

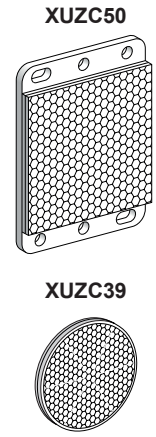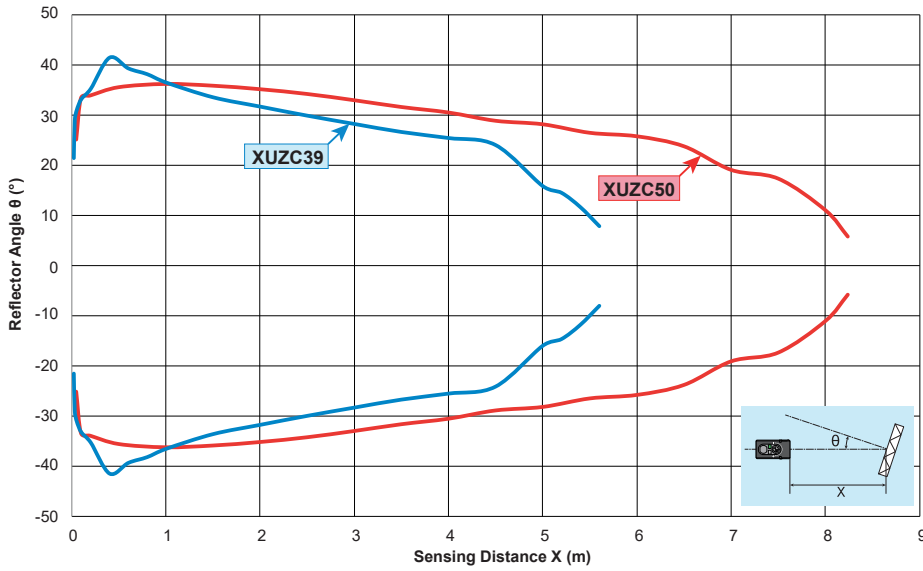

Lateral Displacement - Polarized Retro-reflective XUM9

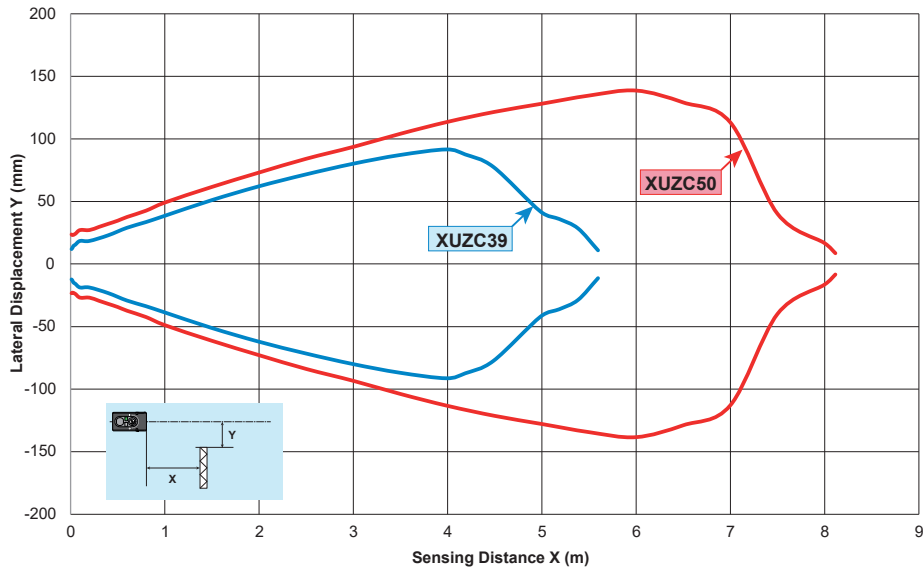


Excess Gain - Polarized Retro-reflective XUM9

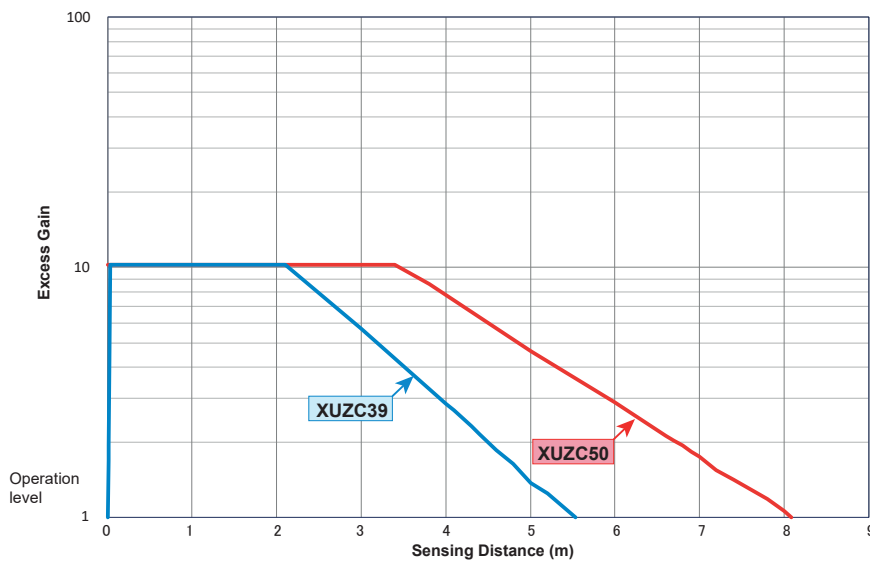

Characteristics

1 mm = 0.0397 in.

| | |
|--|--|
| Certification | CE - UKCA - cULus |
| Sensing Range (using a 50 mm x 50 mm reflector XUZC50) Excess gain = 1: Maximum sensing distance | 8 m - excess gain = 1 6,7 m - excess gain = 2 |
| Color of detection light beam | Red |
| Blind zone | 50 mm using a 50 mm x 50 mm reflector XUZC50 (for the reflector - no blind zone for objects) |
| Sensing distance setting | Potentiometer 1 turn (~ 240 degrees) |
| Light-On/Dark-On selection | Switch (~ 120 degrees) |
| Output type | One open collector output, PNP or NPN |
| ON Voltage drop | 2 V max. (30 Vdc 100 mA) / 1,2 V max. (30 Vdc 10mA) |
| Current consumption | < 20 mA max. |
| Switching capacity | 100 mA |
| Response time | 0,5 ms max. |
| Recovery time | 0,5 ms max. |
| Switching frequency | 1000 Hz |
| Electrostatic discharge immunity | 4 kV (Contact), 8 kV (Air) conforming to IEC 61000-4-2 |
| Electromagnetic field immunity | 10 V/m conforming to IEC 61000-4-3 |
| Fast transients immunity | Burst 5 kHz - 2 kV conforming to IEC 61000-4-4 |
| Conducted disturbances immunity | 10 V conforming to IEC 61000-4-6 |
| Emissivity Radiated disturbances | Class A conforming to EN 55011 / CISPR 11 |
| Power Voltage | Rated operational voltage: 12...24 Vdc Ripple p-p 10% maximum Operating range: 10...30 Vdc (including ripple)  |
| Product protection | Power supply : Reverse polarity protection Output: Short circuit protection Reverse polarity protection |
| Light Immunity | Operating atmosphere; Sunlight 40 kLx max. Incandescent light 10 kLx max. (at the receiver surface) |
| Ambient Temperature | Operating : - 30...+55 °C (-22...+131 °F), Storage : - 40...+70 °C (-40...+158 °F) |
| Ambient Humidity | Operating : 35...95% RH, Storage : 35...95% RH |
| Degree of protection | IP65, IP67 conforming to IEC 60529 |
| Vibration resistance | Frequency range: 10 Hz to 500 Hz Acceleration: 9 g _n |
| Shock resistance | Peak acceleration: 100 g _n Duration of the pulse: 11 ms |
| Material | Housing: PBT, Lens: PMMA, Operation cover: PC, Adjustment potentiometer: PBT |

**Manufacturer :**

Schneider Electric Industries SAS
35 rue Joseph Monier
92500 Rueil Malmaison
France

**UK Representative :**

Schneider Electric Limited
Stafford Park 5
Telford, TF3 3BL
United Kingdom