

Product Environmental Profile

iC60N 1P 16A B






General information

Representative product	iC60N 1P 16A B -A9F03116
Description of the product	The main purpose of the iC60 circuit breaker is to ensure protection of low voltage electrical installation
Functional unit	Protect during 20 years the installation against overloads and short-circuits in circuit with assigned voltage 230/400V and rated current 16A. This protection is ensured in accordance with the following parameters: - Number of poles Np :1 - Rated breaking capacity Icn : 6K(6000A) - Tripping curve Cd : B



Constituent materials

Reference product mass	119.15 g including the product, its packaging and additional elements and accessories
-------------------------------	---

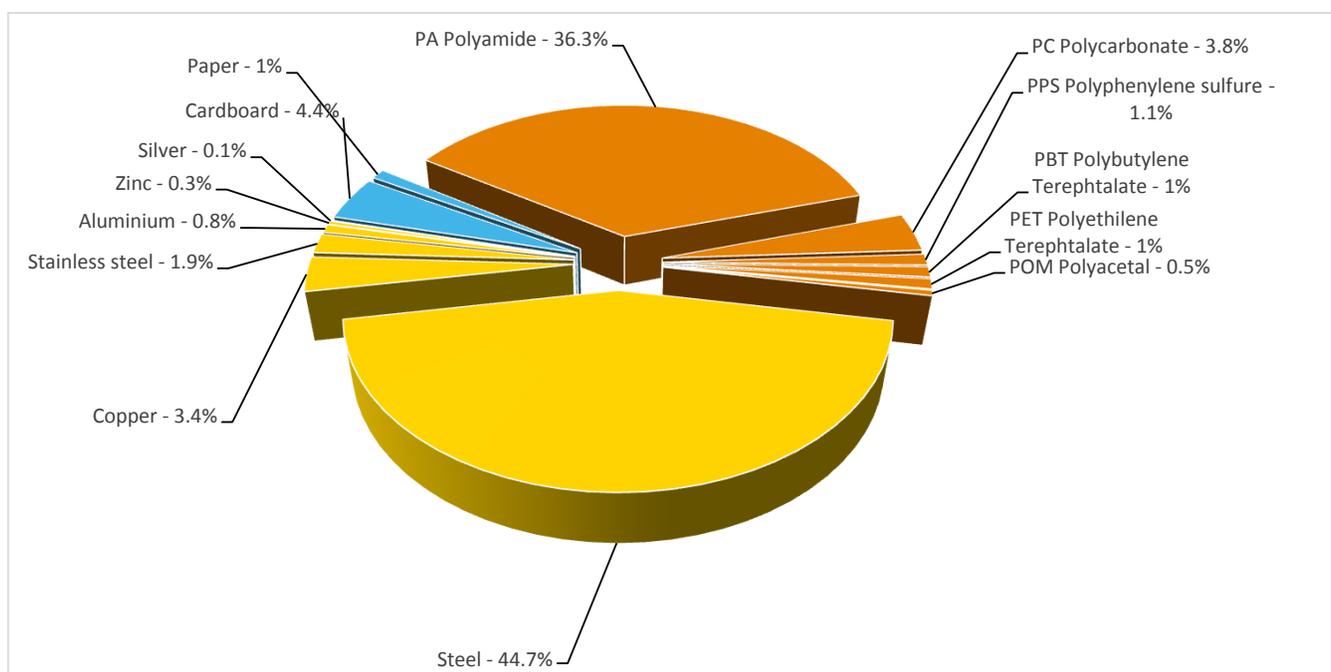

Substance assessment

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The iC60N 1P 16A B presents the following relevant environmental aspects


Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 5.9 g, consisting of cardboard (88.63%), Paper (11.36%) Product distribution optimised by setting up local distribution centres
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process. Recyclability potential: 51% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).


Environmental impacts

Reference life time	20 years			
Product category	Passive products - continuous operation			
Installation elements	The packaging disposal is accounted for in the installation phase.			
Use scenario	Product dissipation is 1 W , loading rate is 50% and service uptime percentage is 100%			
Geographical	Europe			
Technological representativeness	The main purpose of the iC60 circuit breaker is to ensure protection of low voltage electrical installation			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: Chennai, India	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; FI1-27

Compulsory indicators		iC60N 1P 16A B - A9F03116					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1,54E-04	1,51E-04	0*	0*	2,24E-06	0*
Contribution to the soil and water acidification	kg SO ₂ eq	1,10E-01	2,33E-03	7,02E-05	0*	1,07E-01	3,44E-05
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	7,22E-03	6,95E-04	1,62E-05	1,44E-05	6,49E-03	9,67E-06
Contribution to global warming	kg CO ₂ eq	2,67E+01	8,64E-01	1,54E-02	7,80E-03	2,58E+01	1,85E-02
Contribution to ozone layer depletion	kg CFC11 eq	2,00E-06	3,26E-07	0*	0*	1,68E-06	7,75E-10
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	6,14E-03	2,24E-04	5,01E-06	1,86E-06	5,90E-03	3,58E-06

Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	9,34E+01	0*	0*	0*	9,34E+01	0*
Total Primary Energy	MJ	5,25E+02	1,05E+01	2,17E-01	0*	5,14E+02	1,67E-01

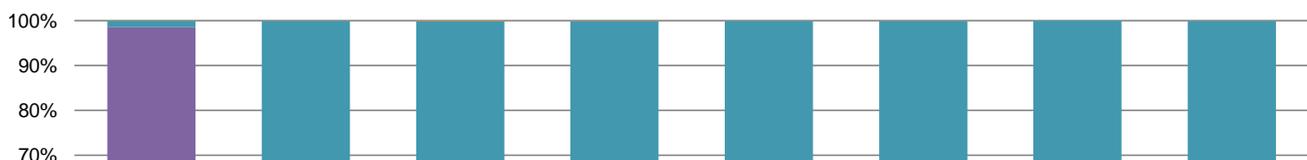

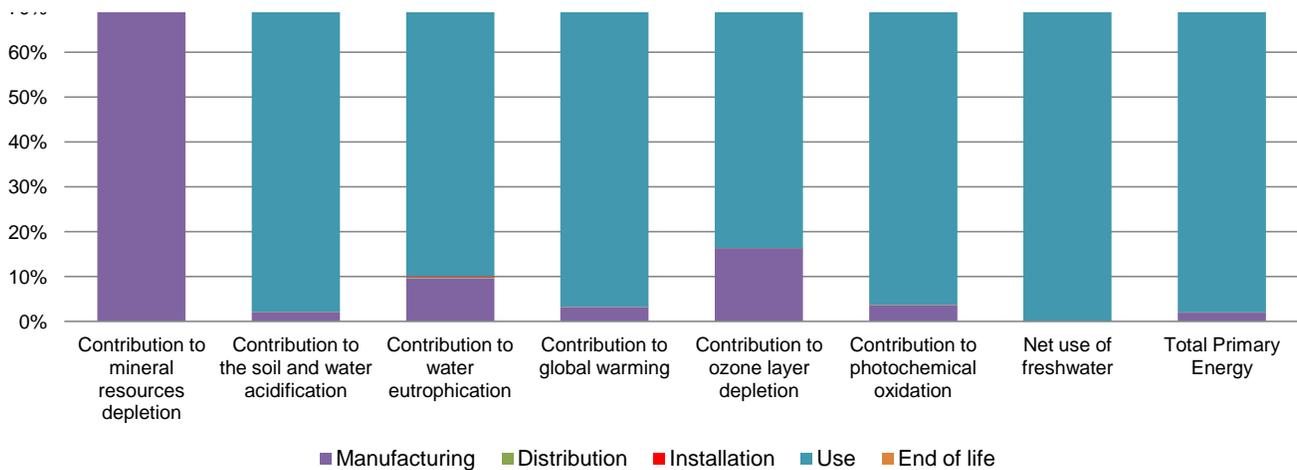

Optional indicators		iC60N 1P 16A B - A9F03116					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	3,01E+02	7,94E+00	2,16E-01	0*	2,92E+02	1,52E-01
Contribution to air pollution	m³	1,28E+03	1,65E+02	6,54E-01	0*	1,11E+03	1,21E+00
Contribution to water pollution	m³	1,33E+03	2,66E+02	2,53E+00	3,96E-01	1,06E+03	1,46E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1,99E-03	1,99E-03	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	6,56E+01	2,26E-01	0*	0*	6,54E+01	0*
Total use of non-renewable primary energy resources	MJ	4,60E+02	1,02E+01	2,17E-01	0*	4,49E+02	1,67E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	6,55E+01	1,11E-01	0*	0*	6,54E+01	0*
Use of renewable primary energy resources used as raw material	MJ	1,16E-01	1,16E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	4,58E+02	8,84E+00	2,17E-01	0*	4,49E+02	1,67E-01
Use of non renewable primary energy resources used as raw material	MJ	1,40E+00	1,40E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	6,89E+00	6,71E+00	0*	0*	1,34E-02	1,70E-01
Non hazardous waste disposed	kg	9,66E+01	6,05E-01	0*	0*	9,60E+01	0*
Radioactive waste disposed	kg	6,44E-02	2,88E-04	0*	0*	6,41E-02	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	6,73E-02	9,29E-03	0*	0*	0*	5,80E-02
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2,96E-03	3,75E-04	0*	0*	0*	2,58E-03
Exported Energy	MJ	6,52E-04	2,69E-04	0*	3,83E-04	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.6, database version 2016-11.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

<i>Registration N°</i>	SCHN-00212-V01.01-EN	<i>Drafting rules</i>	PCR-ed3-EN-2015 04 02
<i>Verifier accreditation N°</i>	VH25	<i>Supplemented by</i>	PSR-0005-ed2-EN-2016 03 29
<i>Date of issue</i>	08/2017	<i>Information and reference documents</i>	www.pep-ecopassport.org
		<i>Validity period</i>	5 years
<i>Independent verification of the declaration and data, in compliance with ISO 14025 : 2010</i>			
Internal	External X		
<i>The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)</i>			
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »</i>			



Schneider Electric Industries SAS

35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com

SCHN-00212-V01.01-EN

Published by Schneider Electric

© 2016 - Schneider Electric – All rights reserved

08/2017