


Product Environmental Profile

NSX250F 36kA AC 3P3D 250A TMD




General information

Representative product	NSX250F 36kA AC 3P3D 250A TMD - C25F3TM250
Description of the product	The Compact NSX250F 3 pole circuit breaker equipped with Thermal-magnetic (TM-D) trip units is designed to provide protection against overloads and short-circuits for industrial and commercial electrical distribution systems with assigned voltage upto 690VAC and rated current of 250A.
Functional unit	This product is to protect the installation during 20 years against overloads and short-circuits in circuit with assigned voltage 690VAC and rated current 250A. This protection is ensured in accordance with the following parameters: - Number of poles = 3 - Rated service breaking capacity Ics at 380/415 V AC = 36 kA (according to IEC 60947-2) - Tripping curve = Long time and instantaneous protections

Constituent materials

Reference product mass 2035g including the product, its packaging and additional elements and accessories

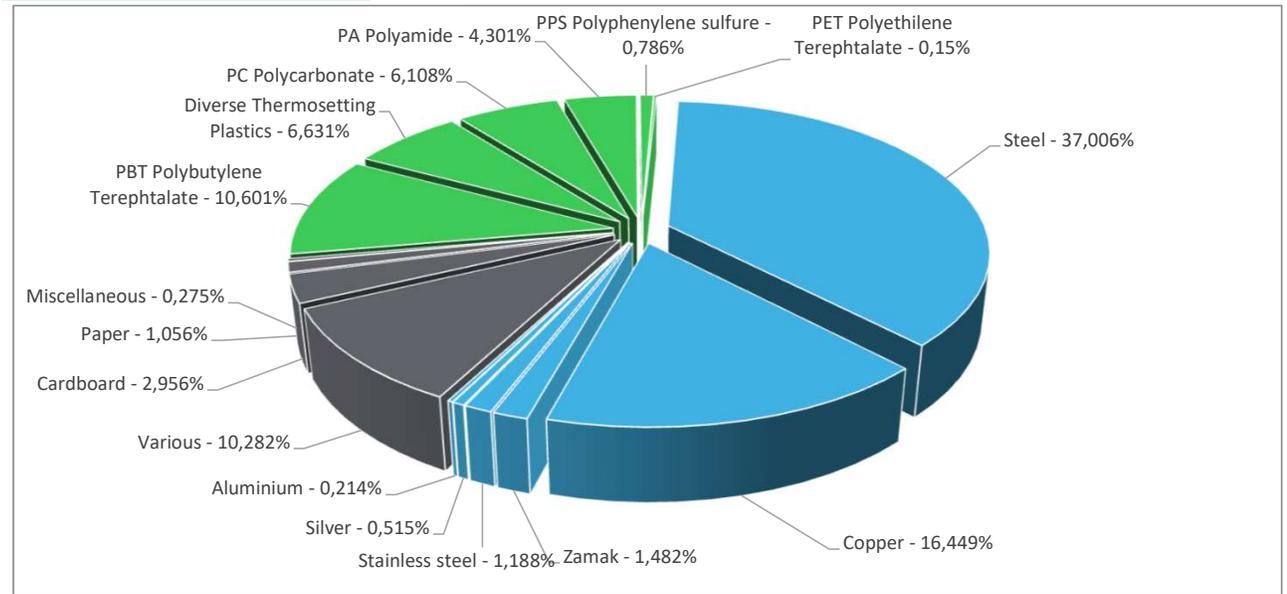

Plastics	28,58%
Metals	56,85%
Others	14,57%

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website
<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The NSX250F 36kA AC 3P3D 250A TMD presents the following relevant environmental aspects


Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 75,8 g, consisting of Cardboard (88.4%), Paper (11.1%) , PE Polyethylene (0.3%) & PET (0.2%) Product distribution optimised by setting up local distribution centres
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains Brominated Flame Retardant Plastic parts (193.93g) that should be separated from the stream of waste so as to optimize end-of-life treatment. The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page Recyclability potential: 54% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



Environmental impacts

Reference life time	20 years			
Product category	Circuit-breakers			
Installation elements	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).			
Use scenario	The product is in active mode 30% of the time with a power use of 14.06W and in stand-by mode 70% of the time with a power use of 0W, for 20 years			
Geographical representativeness	Global			
Technological representativeness	The modules of technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are similar and representative of the actual type of technologies used to make the product.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: Bukowno - Poland	Electricity mix; AC;consumption mix, at consumer; 220V; CN;at consumer; < 1kV; EU-27; at consumer; 240V; AU;at consumer; 230V; IN	Electricity mix; AC;consumption mix, at consumer; 220V; CN;at consumer; < 1kV; EU-27; at consumer; 240V; AU; at consumer; 230V; IN	Electricity mix; AC;consumption mix, at consumer; 220V; CN;at consumer; < 1kV; EU-27; at consumer; 240V; AU;at consumer; 230V; IN

Compulsory indicators		NSX250F 36kA AC 3P3D 250A TMD - C25F3TM250					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2,13E-02	2,13E-02	0*	0*	1,27E-05	0*
Contribution to the soil and water acidification	kg SO ₂ eq	1,07E+00	2,37E-02	1,20E-03	0*	1,04E+00	6,10E-04
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	1,83E-01	7,54E-03	2,76E-04	0*	1,75E-01	1,69E-04
Contribution to global warming	kg CO ₂ eq	6,42E+02	9,15E+00	2,63E-01	0*	6,32E+02	3,14E-01
Contribution to ozone layer depletion	kg CFC11 eq	1,44E-05	1,17E-06	0*	0*	1,32E-05	1,37E-08
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	9,72E-02	2,98E-03	8,56E-05	0*	9,41E-02	6,38E-05
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m ³	4,39E+02	2,11E+00	0*	0*	4,37E+02	0*
Total Primary Energy	MJ	1,08E+04	1,59E+02	3,71E+00	0*	1,06E+04	2,97E+00

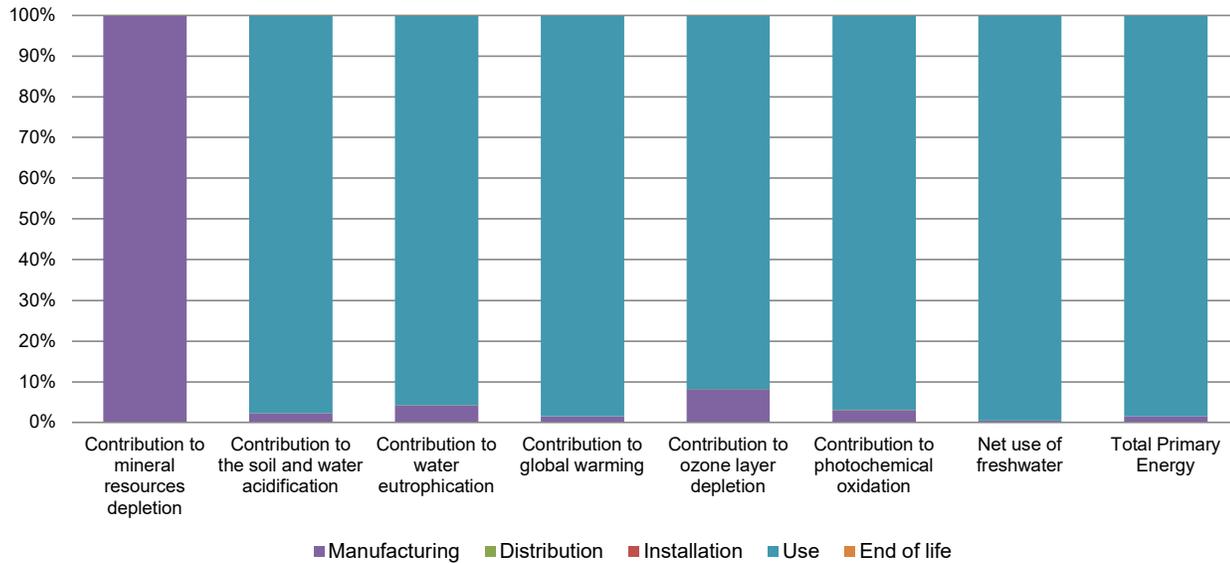

Optional indicators		NSX250F 36kA AC 3P3D 250A TMD - C25F3TM250						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Contribution to fossil resources depletion	MJ	9,05E+03	9,40E+01	3,69E+00	0*	8,95E+03	2,39E+00	
Contribution to air pollution	m³	6,13E+04	3,90E+03	1,12E+01	0*	5,73E+04	2,15E+01	
Contribution to water pollution	m³	3,10E+04	8,03E+02	4,32E+01	0*	3,01E+04	2,57E+01	
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Use of secondary material	kg	2,03E-01	2,03E-01	0*	0*	0*	0*	
Total use of renewable primary energy resources	MJ	6,99E+02	5,82E+00	0*	0*	6,93E+02	0*	
Total use of non-renewable primary energy resources	MJ	1,01E+04	1,53E+02	3,71E+00	0*	9,89E+03	2,97E+00	
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	6,98E+02	5,60E+00	0*	0*	6,93E+02	0*	
Use of renewable primary energy resources used as raw material	MJ	2,22E-01	2,22E-01	0*	0*	0*	0*	
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1,00E+04	1,39E+02	3,71E+00	0*	9,89E+03	2,97E+00	
Use of non renewable primary energy resources used as raw material	MJ	1,43E+01	1,43E+01	0*	0*	0*	0*	
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Hazardous waste disposed	kg	1,60E+02	1,40E+02	0*	0*	1,63E+01	2,98E+00	
Non hazardous waste disposed	kg	5,48E+02	7,05E+00	0*	0*	5,41E+02	0*	
Radioactive waste disposed	kg	3,05E-01	3,45E-03	0*	0*	3,02E-01	0*	
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Materials for recycling	kg	1,33E+00	1,64E-01	0*	7,50E-02	0*	1,09E+00	
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*	
Materials for energy recovery	kg	4,08E-02	0*	0*	0*	0*	4,08E-02	
Exported Energy	MJ	2,38E-04	2,23E-05	0*	2,15E-04	0*	0*	

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

The Manufacturing phase is impacting on Indicator of Abiotic depletion (elements, ultimate ultimate reserves). The Manufacturing phase and Use phase are equally impacting on Indicator of Ozone layer depletion ODP steady state. The use phase is the life cycle phase which has the greatest impact on the rest of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

<i>Registration number</i>	ENVPEP2107006_V2	<i>Drafting rules</i>	PCR-ed3-EN-2015 04 02
<i>Date of issue</i>	12/2022	<i>Supplemented by</i>	PSR-0005-ed2-EN-2016 03 29
<i>Validity period</i>	5 years	<i>Information and reference documents</i>	www.pep-ecopassport.org
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP2107006_V2

© 2019 - Schneider Electric – All rights reserved

12/2022