


Cewka wsuwana dla wielkości S6 do styczników 3RT105 / 3RT145
uruchamianie AC / DC UC 220...240 V, napęd: konwencjonalny
przyłącze śrubowe



Ogólne dane techniczne	
Nazwa markowa produktu	SIRIUS
oznaczenie produktu	Cewka
Obwód sterowniczy	
rodzaj napięcia zasilającego napięcia sterującego	AC/DC
zasilające napięcie sterujące	
• 2 przy AC — przy 50 Hz wartość znamionowa 240 V — przy 60 Hz wartość znamionowa 240 V	
zasilające napięcie sterujące	
• 2 przy DC wartość znamionowa 240 V	
Aprobaty/ Certyfikaty	

General Product Approval	EMC	Functional Safety/Safety of Machinery	Declaration of Conformity
--------------------------	-----	---------------------------------------	---------------------------

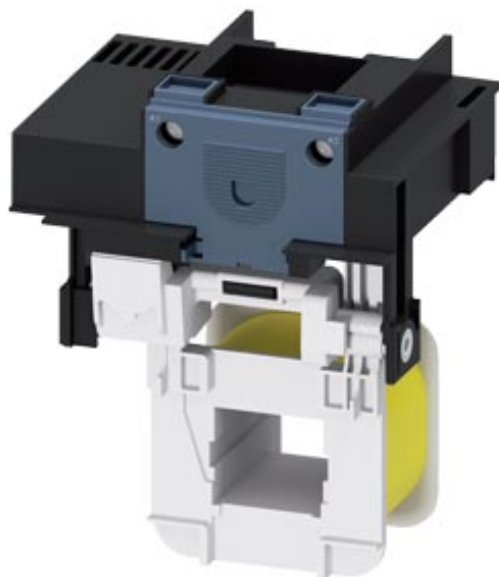

[Type Examination Certificate](#)



EG-Konf.

Declaration of Conformity	Test Certificates	Shipping Approval
---------------------------	-------------------	-------------------

[Miscellaneous](#)

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



ABS



PRS



RINA

Shipping Approval	other	Railway
-------------------	-------	---------



RMRS

[Confirmation](#)

[Miscellaneous](#)

[Special Test Certificate](#)

Więcej informacji

Information- and Downloadcenter

<https://www.siemens.com/ic10>

Industry Mall (System zamawiania online)

<https://mall.industry.siemens.com/mall/pl/pl/Catalog/product?mlfb=3RT1955-5AP31>

CAX-Online-Generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1955-5AP31>


Service&Support

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1955-5AP31>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1955-5AP31&lang=en

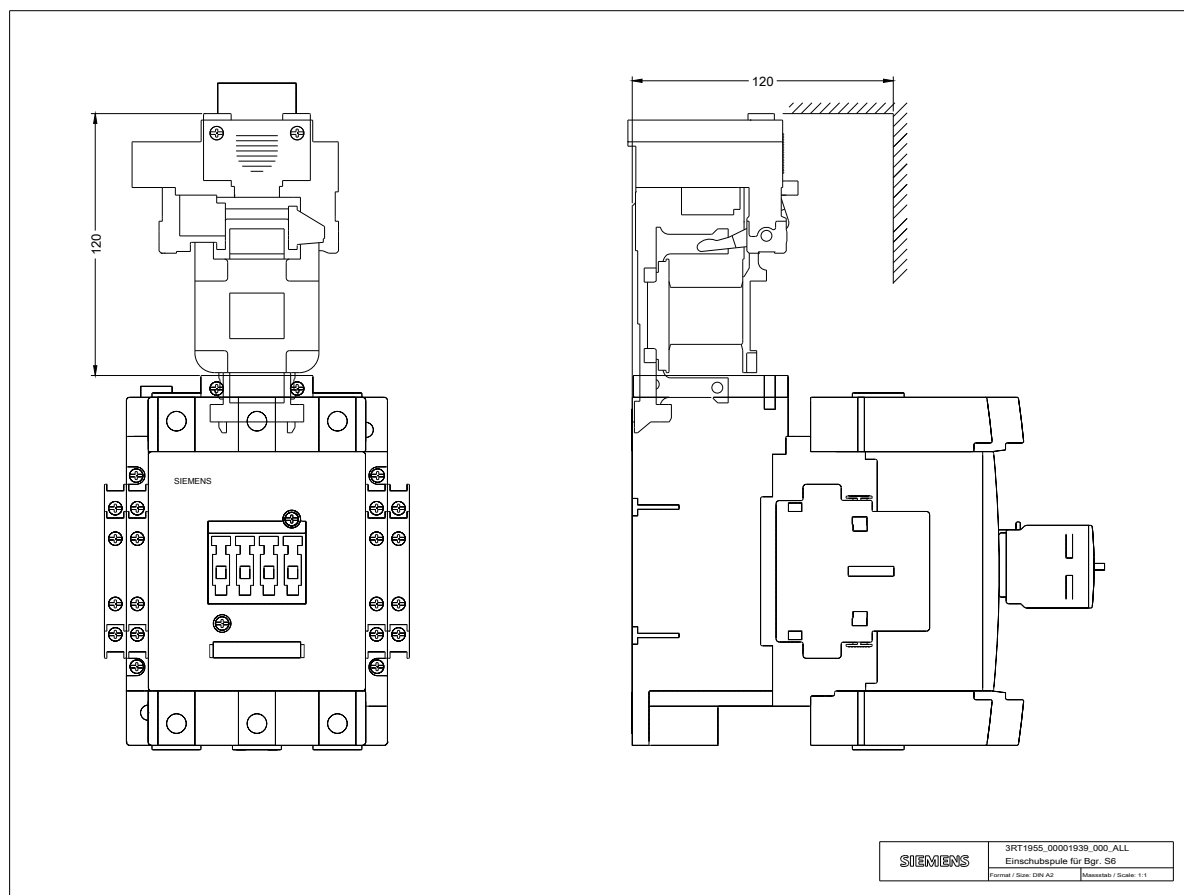

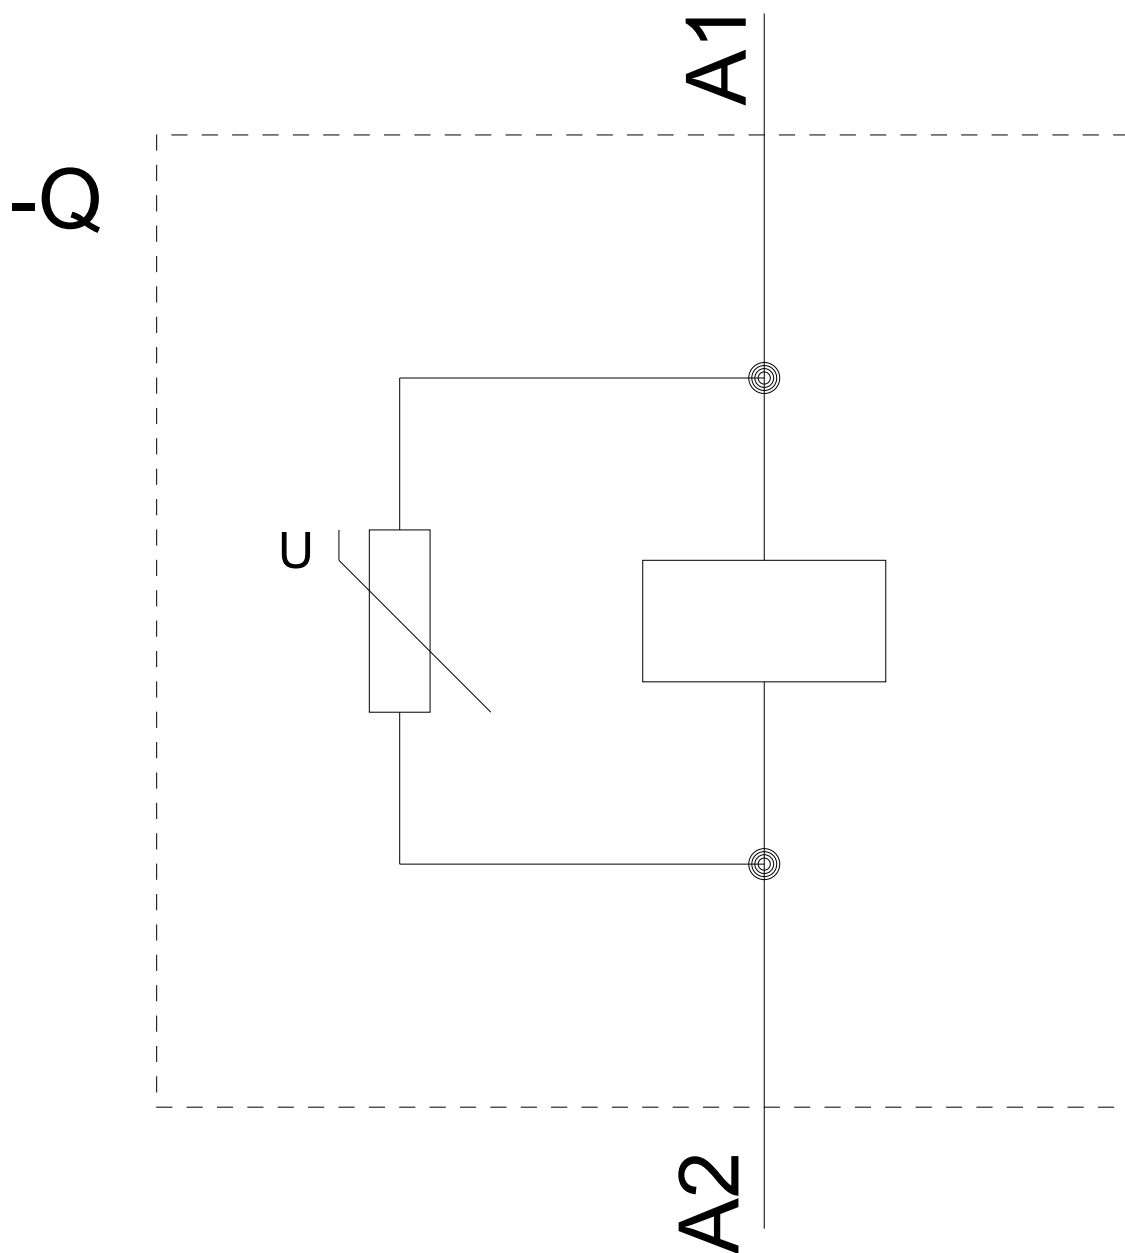

Ostatnia zmiana:

15.01.2020