

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



String combiner box for photovoltaic systems up to 1000 V DC for the connection of 1x 1 string. With surge protection and SUNCLIX DC connector for the input and output side.

#### **Product Description**

The Solarline string combiner boxes (SCBs) are used in both small rooftop systems and large ground-mounted systems. Their functions include collecting and protecting strings and, if necessary, separating the panels from the rest of the system by means of a switch disconnector or fire service switch disconnector.

#### Your advantages

- Application-oriented consultation



# **Key Commercial Data**

Packing unit	1 pc
GTIN	4 055626 370521
GTIN	4055626370521

## Technical data

### System parameter

System voltage	1000 V DC (U <sub>max</sub> )
Number of string inputs	1
Current per string (max.)	40 A (I <sub>max</sub> )
Number of outputs	1 (per MPP tracker)
Number of supported MPP trackers	1

### Safety equipment

Surge protective device	Т2
Protection level U <sub>p</sub>	≤ 3.7 kV



# Technical data

## Safety equipment

Total discharge current  $I_{total}$  (8/20)  $\mu s$ 

Cable entry	
Type of cable entry	SUNCLIX
Cable cross section string input	2.5 mm² 6 mm²
	0.5

40 kA

 Cable cross section output
 2.5 mm² ... 6 mm²

 Cable cross section grounding
 16 mm² (2x)

Sealing area grounding 6 mm ... 12 mm (2x)

## General data

Material cover/door	Polycarbonate (transparent)
Housing material	Polycarbonate
Degree of protection	IP65
Protection class	II

### Dimensions

Outer dimensions: width, height, depth 130 mm x 180 mm x 111 mm (Housing dimensions)
--

### Ambient conditions

Ambient temperature (operation)	-20 °C 55 °C
---------------------------------	--------------

# **Drawings**



Schematic diagram




느

Connection of the protective grounding conductor

Schematic diagram






Connection of the protective equipotential bonding conductor



Connection diagram




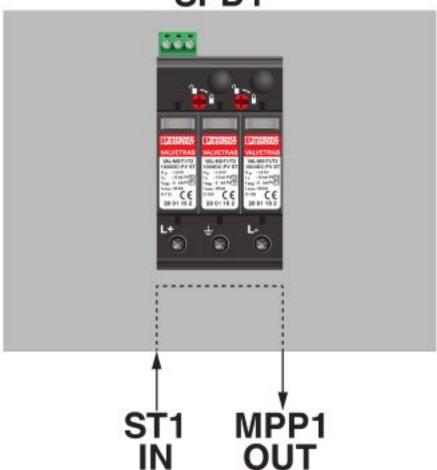

Schematic application drawing




# Dimensional drawing

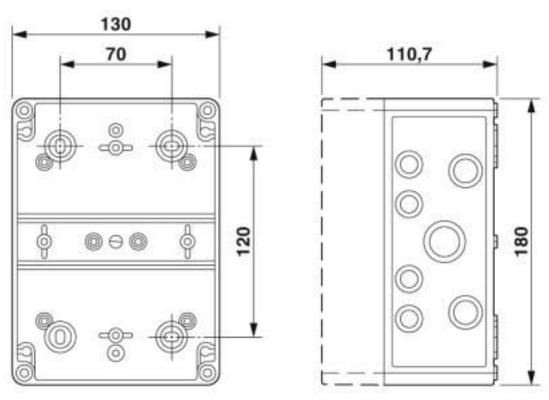

Housing dimensions




Circuit diagram

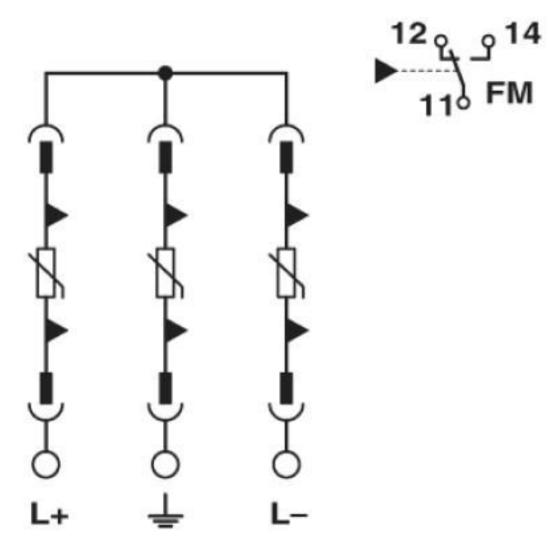


Connection of the remote indication contact on the surge protection






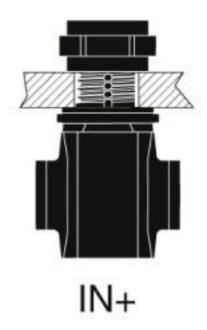


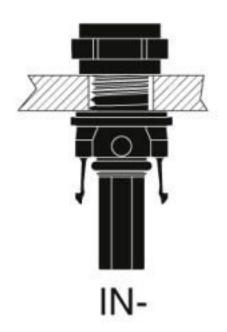

Connection of the PV string

Schematic diagram

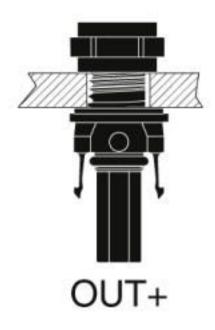

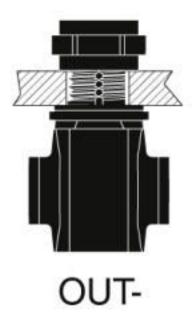

Connection to the inverter

# Classifications

eCl@ss

l eCl@ss 10.0.1	1 27142422
I eCl@ss 10.0.1	21 142422



# Classifications

## eCl@ss

eCl@ss 11.0	27142422
eCl@ss 5.1	27371890
eCl@ss 7.0	27142422
eCl@ss 8.0	27142422
eCl@ss 9.0	27142422

#### **ETIM**

ETIM 4.0	EC000816
ETIM 5.0	EC000268
ETIM 6.0	EC000268
ETIM 7.0	EC000268

### Accessories

#### Accessories

Photovoltaic connector

Protective cap - PV-C PROTECTION CAP - 1785430



Photovoltaic connector, Range of articles: SUNCLIX, Protective cap, color: black. self-sealing, without interlock, set consisting of: 1 protective cap for connector side and 1 protective cap for coupling side

Photovoltaic Y-distributor - PV-ED6/Y-120(2+/1-) - 1030649





Photovoltaic Y-distributor - PV-ED6/Y-120(1+/2-) - 1030650

Photovoltaic connector, Photovoltaic Y-distributor, housing material: PPE, color: black





### Accessories

Connector - PV-CF-S 2,5-6 (+) - 1774674



Photovoltaic connector, Range of articles: PV-CF-S, Connector, housing material: PPE, color: black, number of positions: 1, min. conductor cross section: 2.5 mm², max. conductor cross section: 6 mm², rated current: 27 A, Connection method: Spring-cage, Type of contact: Socket

#### Connector - PV-CM-S 2,5-6 (-) - 1774687



Photovoltaic connector, Range of articles: PV-CM-S, Connector, housing material: PPE, color: black, number of positions: 1, min. conductor cross section: 2.5 mm², max. conductor cross section: 6 mm², rated current: 27 A, Connection method: Spring-cage, Type of contact: Pin

### Connector - PV-CF-S 6-16 (+) - 1790784



Photovoltaic connector, Range of articles: PV-CF-S, Connector, housing material: PPE, color: black, number of positions: 0, min. conductor cross section: 6 mm², max. conductor cross section: 16 mm², rated current: 40 A, Connection method: Spring-cage, Type of contact: Socket

#### Connector - PV-CM-S 6-16 (-) - 1790797



Photovoltaic connector, Range of articles: PV-CM-S, Connector, housing material: PPE, color: black, number of positions: 0, min. conductor cross section: 6 mm², max. conductor cross section: 16 mm², rated current: 40 A, Connection method: Spring-cage, Type of contact: Pin

### Photovoltaic adapter set - PV-AS-MC4/6-150-MN-SET1 - 1079531



Photovoltaic connector, Photovoltaic adapter set, type: Adapter, color: black, rated current: 35 A, cable length: 150. Connect these connectors only to other connectors of the same type made by the same manufacturer. When making the connections, always observe the specifications regarding nominal voltage and nominal current. The smallest common value is permissible.

### Replacement plug



## Accessories

Type 2 surge protection plug - VAL-MS 1000DC-PV-ST - 2800624



Replacement plug for PV arrester combinations from the VAL-MS 1000DC-PV-... product range

### Tool set

Tool set - TOOL-KIT SOLAR - 1212071



Tool case, equipped with: crimping pliers, pressing dies for MC3, MC4 and SOLARLOK connectors, stripping tool for commercially available solar cables, stripping tool for SUNCLIX, VDE cable cutter, VDE screwdriver: PH1, PH2, 0.6x3.5 and 0.8x4.0 slots.

Phoenix Contact 2020 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany Tel. +49 5235 300

Fax +49 5235 3 41200

http://www.phoenixcontact.com