


# Product data sheet

Specifications

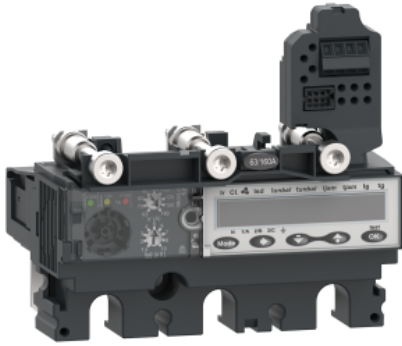

Trip unit MicroLogic 5.2E, ComPacT NSX160/250, 3 poles, electronic basic protections, energy meter, 160A rating

C1635E160

## Main

Range	ComPacT new generation
Range of product	ComPacT NSX100...250 new generation
Product or component type	Trip unit
Trip unit name	Micrologic 5.2 E
Trip unit technology	Electronic
Range compatibility	ComPacT new generation NSX160 ComPacT new generation NSX250
Device application	Distribution
Poles description	3P
Protected poles description	3D
Trip unit protection functions	LSI
Protection type	L : for overload protection (long time) S : for short time short-circuit protection I : for instantaneous short-circuit protection
Trip unit rating	160 A at 40 °C
[Ue] rated operational voltage	690 V AC 50/60 Hz
Network type	AC
Network frequency	50/60 Hz
Circuit breaker mounting mode	Fixed

## Complementary

Long-time pick-up adjustment type I <sub>r</sub> (thermal protection)	Adjustable 9 settings
[I <sub>r</sub> ] long-time protection pick-up adjustment range	63...160 A
Long-time protection delay adjustment type t <sub>r</sub>	Adjustable
[T <sub>r</sub> ] long-time protection delay adjustment range	15...400 s at 1.5 x I <sub>r</sub> 0.35...11 s at 7.2 x I <sub>r</sub> 0.5...16 s at 6 x I <sub>r</sub>
Thermal memory	20 minutes before and after tripping
Short-time protection pick-up adjustment type I <sub>sd</sub>	Adjustable 9 settings

<b>[Isd] Short-time protection pick-up adjustment range</b>	1.5...10 x Ir
<b>Short-time protection delay adjustment type tsd</b>	Adjustable
<b>[Tsd] Short-time protection delay adjustment range</b>	0...0.4 s I <sup>2</sup> t=off 0.1...0.4 s I <sup>2</sup> t=on
<b>Instantaneous protection pick-up adjustment type li</b>	Adjustable
<b>[li] instantaneous protection pick-up adjustment range</b>	1.5...15 x In
<b>Earth-leakage protection</b>	Without
<b>Zone selective interlocking ZSI</b>	With
<b>Local signalling</b>	Flashing LED (green) for ready to operate LED 105 % Ir (red) for overload LED 90 % Ir (orange) for overload
<b>Display type</b>	LCD display
<b>Type of measurement</b>	Energy meter
<b>Communication of data</b>	Energy metering Protection and alarm settings Time-stamped histories and event tables Instantaneous and demand values Maintenance indicators Demand current and power Power quality Maximeters/minimeters
<b>Electrical data recording</b>	Maintenance indicators

## Environment

<b>Standards</b>	EN/IEC 60947-2
<b>Electrical shock protection class</b>	Class II
<b>Pollution degree</b>	3 conforming to IEC 60947-1
<b>IP degree of protection</b>	IP40 conforming to IEC 60529
<b>Ambient air temperature for operation</b>	-25...70 °C
<b>Ambient air temperature for storage</b>	-40...85 °C

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Weight</b>	554.0 g
<b>Package 1 Height</b>	9.5 cm
<b>Package 1 width</b>	11.0 cm
<b>Package 1 Length</b>	15.2 cm
<b>Unit Type of Package 2</b>	S03
<b>Number of Units in Package 2</b>	11
<b>Package 2 Weight</b>	6.55 kg
<b>Package 2 Height</b>	30.0 cm
<b>Package 2 width</b>	30.0 cm
<b>Package 2 Length</b>	40.0 cm

## Offer Sustainability

---

<b>REACH Regulation</b>	<a href="#">REACH Declaration</a>
<b>EU RoHS Directive</b>	Compliant <a href="#">EU RoHS Declaration</a>
<b>Mercury free</b>	Yes
<b>RoHS exemption information</b>	Yes
<b>China RoHS Regulation</b>	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information
<b>California proposition 65</b>	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

---