


Product data sheet

Specifications

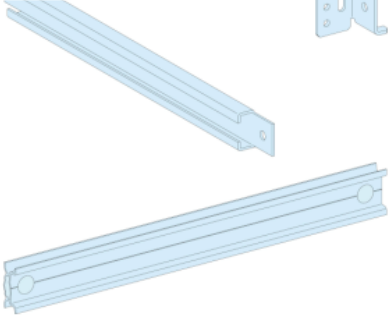

W400 ADJUSTABLE MOD. DEV. RAIL PRISMA P

LVS03404

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Rail
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT P
Type of rail	Modular Adjustable
Installed device	ComPact: fixed INS100 - control: direct front rotary handle - vertical installation ComPact: fixed INS160 - control: direct front rotary handle - vertical installation ComPact: fixed INS40 - control: direct front rotary handle - vertical installation ComPact: fixed INS63 - control: direct front rotary handle - vertical installation Acti 9: fixed modular device Multi 9: fixed modular device Multi 9: fixed NG125 without earth leakage protection - control: toggle ComPact: fixed INS125 - control: direct front rotary handle - vertical installation Acti 9: fixed modular device <= 40 A Multi 9: fixed modular device <= 40 A ComPact: fixed NG160 without earth leakage protection - control: toggle ComPact: fixed NG160 NA without earth leakage protection - control: toggle ComPact: fixed NSA125...160 - control: toggle
Poles description	1 x 3P: fixed INS100 vertical installation 1 x 4P: fixed INS100 vertical installation 1 x 3P: fixed INS160 vertical installation 1 x 4P: fixed INS160 vertical installation 1 x 3P: fixed INS40 vertical installation 1 x 4P: fixed INS40 vertical installation 1 x 3P: fixed INS63 vertical installation 1 x 4P: fixed INS63 vertical installation 1 x 3P: fixed NG125 1 x 4P: fixed NG125 1 x 3P: fixed INS125 vertical installation 1 x 4P: fixed INS125 vertical installation 1 x 3P: fixed NG160 1 x 4P: fixed NG160 1 x 3P: fixed NG160 NA 1 x 4P: fixed NG160 NA 1 x 3P: fixed NSA125...160 1 x 4P: fixed NSA125...160

Complementary

Installation description	Cubicle - width 400 mm depth 400 mm
Enclosure nominal height	2000 mm
Number of vertical modules [50 mm]	4 module(s): INS100, direct in 400 mm Widecubicle 5 module(s): INS100, direct in 400 mm Widecubicle 4 module(s): INS125, direct in 400 mm Widecubicle 5 module(s): INS125, direct in 400 mm Widecubicle 4 module(s): INS160, direct in 400 mm Widecubicle 5 module(s): INS160, direct in 400 mm Widecubicle

	4 module(s): INS40, direct in 400 mm Widecubicle 4 module(s): INS63, direct in 400 mm Widecubicle 3 module(s): modular device <= 40 A, direct in 400 mm Widecubicle 4 module(s): modular device, direct in 400 mm Widecubicle 5 module(s): NG125 without earth leakage protection , direct in 400 mm Widecubicle 5 module(s): NG160 without earth leakage protection , direct in 400 mm Widecubicle 5 module(s): NG160 NA without earth leakage protection , direct in 400 mm Widecubicle 5 module(s): NSA125...160, direct in 400 mm Widecubicle
9 mm pitches	20
Quantity per set	Set of 1
Height	30 mm
Width	325 mm
Depth	325 mm
Net weight	0.76 kg
Colour	Natural
Material	Metal

Environment

Standards	IEC 61439-1 IEC 61439-2
Product certifications	ASTA

Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	769.0 g
Package 1 Height	4.5 cm
Package 1 width	4.0 cm
Package 1 Length	36.0 cm
Unit Type of Package 2	CAR
Number of Units in Package 2	20
Package 2 Weight	15.88 kg
Package 2 Height	30.0 cm
Package 2 width	40.0 cm
Package 2 Length	60.0 cm
Unit Type of Package 3	P12
Number of Units in Package 3	80
Package 3 Weight	75.5 kg
Package 3 Height	43.0 cm
Package 3 width	80.0 cm
Package 3 Length	120.0 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes

Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile
PVC free	Yes
Halogen content performance	Halogen free plastic parts product

Dimensions

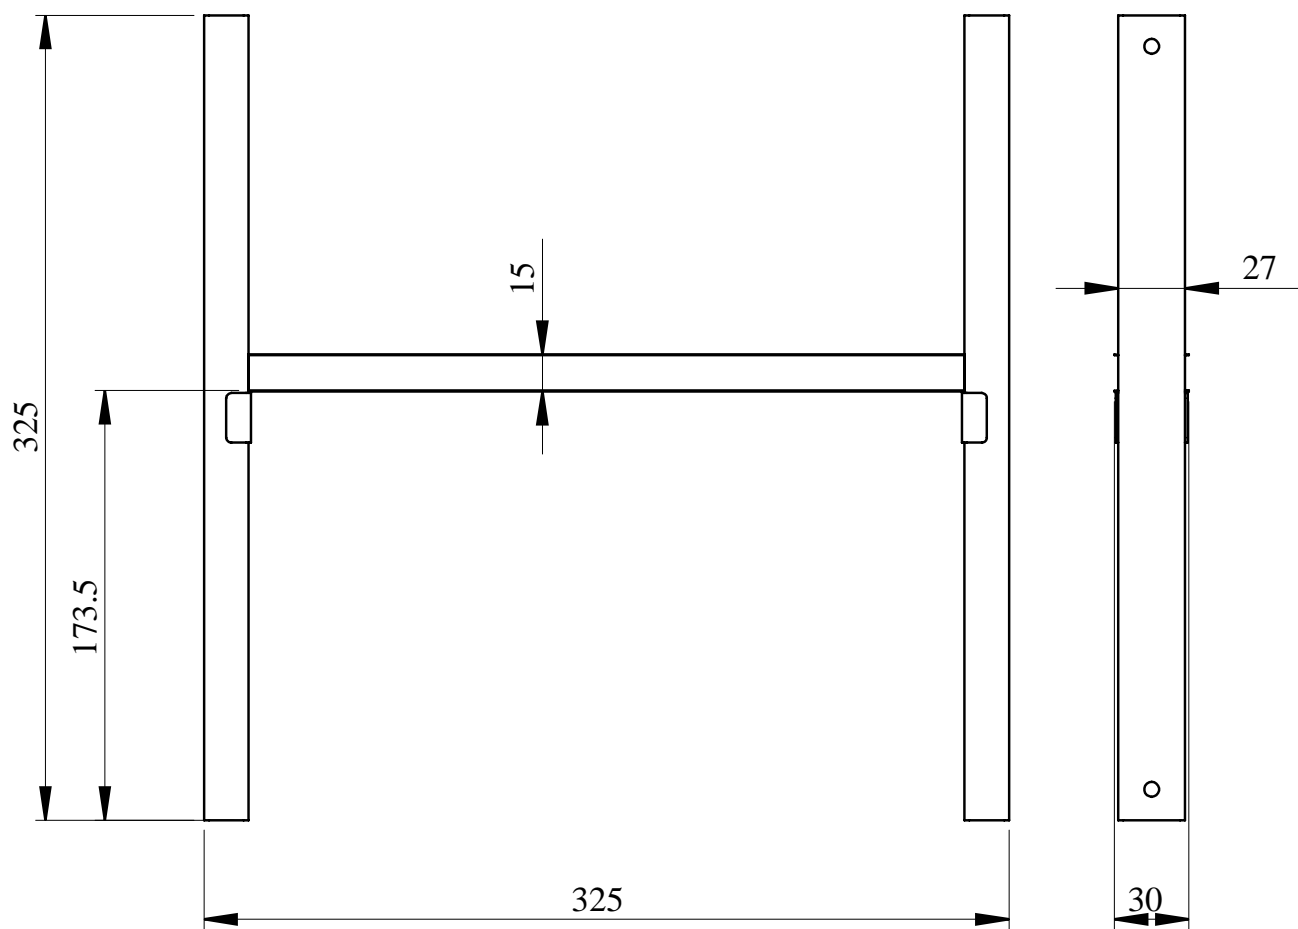

- All dimensions are approximate and are in mm.
- Also see technical documentation.