

OPASKI HGS - ślimakowe ocynkowane


materiał: stal ocynkowana

tolerancja: ±5%



PRODUKTY NA ZAPYTANIE

TYP	Ø ZAKRES ŚREDNIC [mm]	Ø ZAKRES ŚREDNIC ["]	ZALECANY MOMENT DOKRĘCENIA [Nm]
HGS-12	9,5 - 12	3/8 - 1/2	3,0
HGS-16	11 - 16	1/2 - 5/8	3,0
HGS-20	13 - 20	1/2 - 3/4	3,0
HGS-22	14 - 22	5/8 - 7/8	5,0
HGS-25	17 - 25	3/4 - 1	5,0
HGS-30	22 - 30	7/8 - 11/8	5,0
HGS-35	25 - 35	1 - 13/8	5,0
HGS-40	30 - 40	11/8 - 15/8	5,0
HGS-45	35 - 45	13/8 - 13/4	5,0
HGS-50	35 - 50	13/8 - 2	6,0
HGS-55	40 - 55	15/8 - 21/8	6,0
HGS-60	45 - 60	13/4 - 23/8	6,0
HGS-70	50 - 70	2 - 23/4	6,0
HGS-80	60 - 80	23/8 - 31/8	6,0
HGS-90	70 - 90	23/4 - 31/2	6,0
HGS-100	80 - 100	31/8 - 4	6,0
HGS-120	90 - 120	31/2 - 43/4	6,0
HGS-180	150 - 180	57/8 - 71/8	6,0
HGS-200	170 - 200	65/8 - 77/8	6,0
HGS-220	210 - 240	71/2 - 85/8	6,0
HGS-240	230 - 260	81/4 - 91/2	6,0
HGS-260	230 - 280	9 - 101/4	6,0
HGS-280	250 - 280	97/8 - 11	6,0
HGS-300	270 - 300	105/8 - 113/4	6,0
HGS-320	290 - 320	113/8 - 121/2	6,0

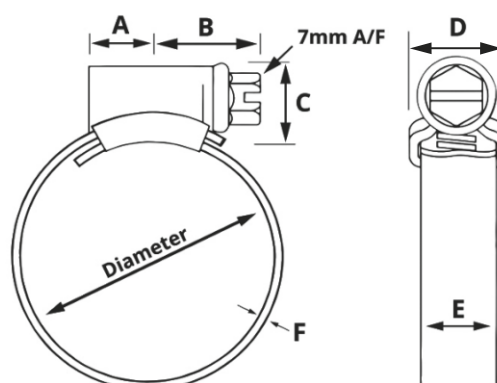

ROZMIAR	WYMIARY [mm]					
	A	B	C	D	E	F
HGS-12 ÷ HGS-20	7	14	10	13	10	0,7
HGS-22 ÷ HGS-45	8	15	12	16	13	0,9
HGS-50 ÷ HGS-320	13	20	12	16	13	0,9



BS5315



złącz

TRYTYT.COM!