

## DS-3E0106P-E/M



- 4 x 10/100Mbps PoE ports, and 2 x 10/100Mbps RJ45 ports.
- IEEE 802.3at/af standard for PoE ports (Max. 35 W PoE output).
- IEEE 802.3, IEEE 802.3u, and IEEE 802.3x standard.
- 6 kV surge protection for PoE ports.
- Up to 300 m long-range transmission.
- Wire-speed forwarding.
- Store-and-forward switching.
- Solid high-strength metal shell.
- Reliable fan-free design.


## ▪ Specification

Model		DS-3E0106P-E/M
Network Parameters	Ports	4 x 10/100 Mbps PoE port, and 2 x 10/100 Mbps RJ45 port
	Port Type	RJ45 port, full duplex, MDI/MDI-X adaptive
	Standard	IEEE 802.3, IEEE 802.3u, IEEE 802.3x
	High Priority Ports	Ports 1 to 2
	MAC Address Table	2 K
	Switching Capacity	1.2 Gbps
	Internal Cache	768 Kbits
PoE Power Supply	PoE Standard	IEEE 802.3af/at PoE standard
	PoE Port	4
	Max. Port Power	30 W
	PoE Power Budget	35 W
General	Dimensions (W × H × D)	145 mm × 68.45 mm × 25.6 mm (5.71" × 2.69" × 1.01")
	Shell	Metal material, fan-free design
	Gross Weight	0.52 kg (1.15 lb)
	Net Weight	0.27 kg (0.60 lb)
	Operating Temperature	-10 °C to 40 °C (14 °F to 104 °F)
	Operating Humidity	5% to 95%
	Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
	Storage Humidity	5% to 95%
	Power Supply	48 V 0.8 A
Approval	EMC	FCC (47 CFR Part 15, Subpart B); CE-EMC (EN 55032: 2015, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 55024: 2010 +A1: 2015); RCM (AS/NZS CISPR 32: 2015); IC (ICES-003: Issue 6, 2016)
	Safety	UL (UL 60950-1); CB (IEC 60950-1:2005 + Am 1:2009 + Am 2:2013); CE-LVD (EN 60950-1:2005 + Am 1:2009 + Am 2:2013)

## ▪ Available Model

DS-3E0106P-E/M

▪ Dimension (Unit: mm)

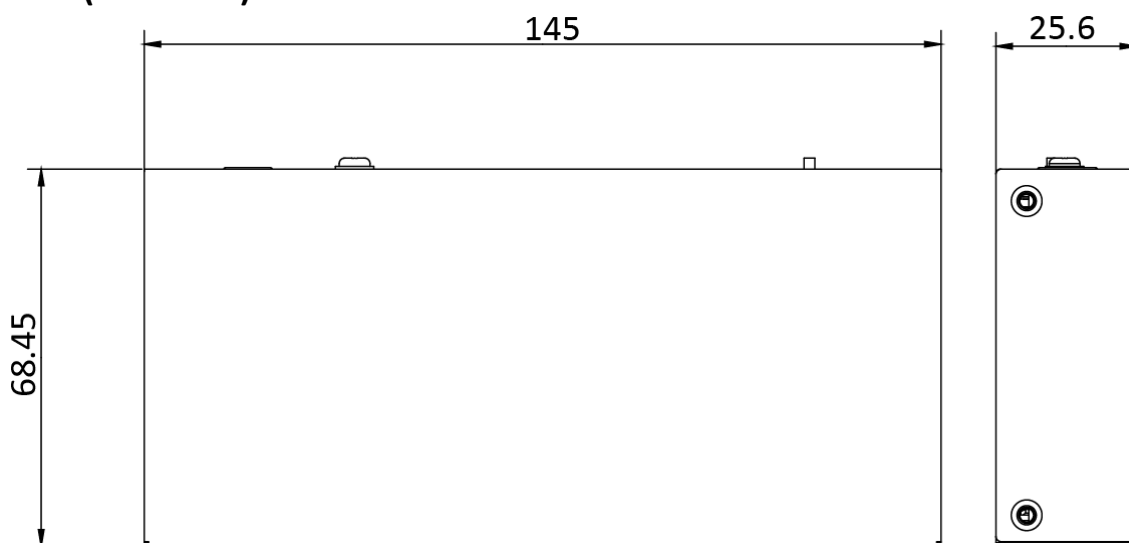

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

