
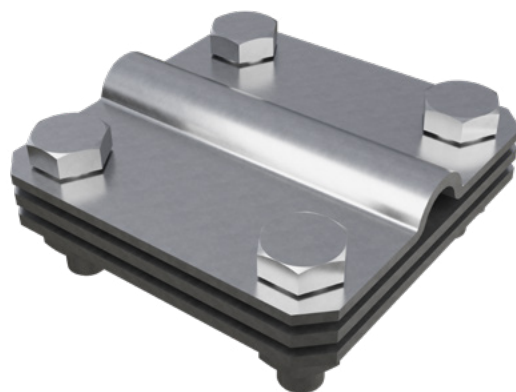


	STAL OCYNKOWANA GALWANICZNIE <i>Zinc galvanised</i>	STAL OCYNKOWANA OGNIOWO <i>Hot-dip galvanised</i>	STAL NIERDZEWNA* <i>Stainless steel*</i>	MIEDŹ <i>Copper</i>	ŚRUBY <i>Bolts</i>	LICZBA ELEMENTÓW <i>Number of items</i>	A	B	C
Nr Kat./ No. Cat. Typ/ Type	L20811 ZDB.52.OC	L20812 ZDB.52.OC	L20813 ZDB.52.NI	L20814 ZDB.52.CU	4 x M8 x 20	2	80	52	2,5
	L20851 ZDB.42.OC	L20852 ZDB.42.OC	L20853 ZDB.42.NI	L20854 ZDB.42.CU	4 x M8 x 20	2	70	42	2,5
	L20821 ZDB.32.OC	L20822 ZDB.32.OC	L20823 ZDB.32.NI	L20824 ZDB.32.CU	4 x M8 x 20	2	60	32	2,5
	L20831 ZDB.53.OC	L20832 ZDB.53.OC	L20833 ZDB.53.NI	L20834 ZDB.53.CU	4 x M8 x 30	3	80	52	2,5
	L20861 ZDB.43.OC	L20862 ZDB.43.OC	L20863 ZDB.43.NI	L20864 ZDB.43.CU	4 x M8 x 30	3	70	42	2,5
	L20841 ZDB.33.OC	L20842 ZDB.33.OC	L20843 ZDB.33.NI	L20844 ZDB.33.CU	4 x M8 x 30	3	60	32	2,5

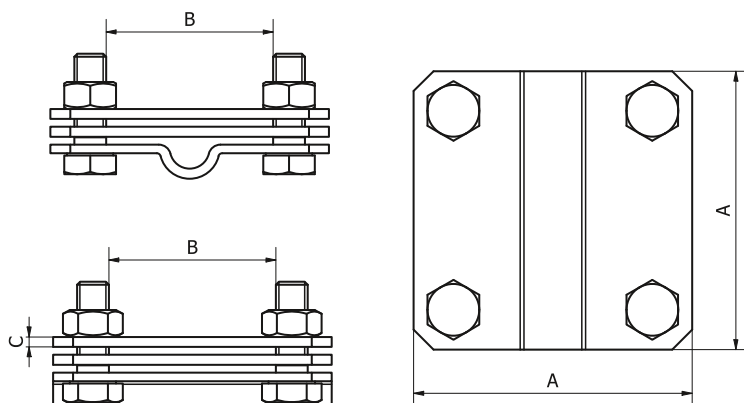

Przeznaczone do połączeń bednarki z drutem odgromowym do Ø10. Produkt występuje w dwóch wariantach: dwuelementowym i trzelementowym – gdzie bednarkę od drutu rozdziela płaska blaszka. Występuje również w trzech rozmiarach: dla bednarek o szerokości do 30 mm, do 40 mm i do 50 mm.

*Elementy wykonywane ze stali nierdzewnej mają grubość 2 mm.

It is used for connecting flat conductor with the Ø10 earthing wire. The product is available in two variants, as two-part or three-part, with a flat plate separating the conductors in the latter. It is available in three dimensions: for flat conductors up to 30 mm, 40 mm, and 50 mm wide.

**Elements made of stainless steel are 2 mm thick.*