

String combiner box (SCB) - SOL-SC-1ST-0-DC-2MPPT-1000SE - 1101176

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



String combiner box for photovoltaic systems up to 1000 V DC for the connection of 2x 1 string. With surge protection and Push-in connection for the input and output side.

Product Description

The Solarline string combiner boxes (SCBs) are used in both small rooftop systems and large ground-mounted systems. Their functions include collecting and protecting strings and, if necessary, separating the panels from the rest of the system by means of a switch disconnect or fire service switch disconnect.

Your advantages

- ✓ Fast installation and startup
- ✓ Large portfolio of string combiner boxes in stock
- ✓ Application-oriented consultation
- ✓ Standard-compliant switchgear and controlgear assembly, thanks to use of DIN EN 61439



Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 957821
GTIN	4055626957821

Technical data

System parameter

System voltage	1000 V DC (U_{max})
Number of string inputs	1 (per MPP tracker)
Current per string (max.)	40 A (I_{max})
Number of outputs	1 (per MPP tracker)
Number of supported MPP trackers	2

Safety equipment

Surge protective device	T1 / T2
-------------------------	---------

String combiner box (SCB) - SOL-SC-1ST-0-DC-2MPPT-1000SE - 1101176

Technical data

Safety equipment

Protection level U_p	$\leq 3.5 \text{ kV}$
Total discharge current $I_{\text{total}} (8/20) \mu\text{s}$	40 kA
Total discharge current $I_{\text{total}} (10/350) \mu\text{s}$	5 kA

Cable entry

Type of cable entry	Cable gland
Cable cross section string input	2.5 mm ² ... 6 mm ²
Sealing area string input	3 mm ... 6.5 mm
Cable cross section output	2.5 mm ² ... 6 mm ²
Sealing area output	3 mm ... 6.5 mm
Cable cross section grounding	16 mm ² (2 x)
Sealing area grounding	6 mm ... 12 mm (2 x)

General data

Material cover/door	Polycarbonate (transparent)
Housing material	Polycarbonate
Degree of protection	IP65
Protection class	II

Dimensions

Outer dimensions: width, height, depth	254 mm x 180 mm x 111 mm (Housing dimensions)
--	---

Ambient conditions

Ambient temperature (operation)	-20 °C ... 55 °C
---------------------------------	------------------

Drawings

String combiner box (SCB) - SOL-SC-1ST-0- DC-2MPPT-1000SE - 1101176

Schematic diagram



Connection of the protective grounding conductor


Schematic diagram



Connection of the protective equipotential bonding conductor

String combiner box (SCB) - SOL-SC-1ST-0- DC-2MPPT-1000SE - 1101176


Schematic diagram

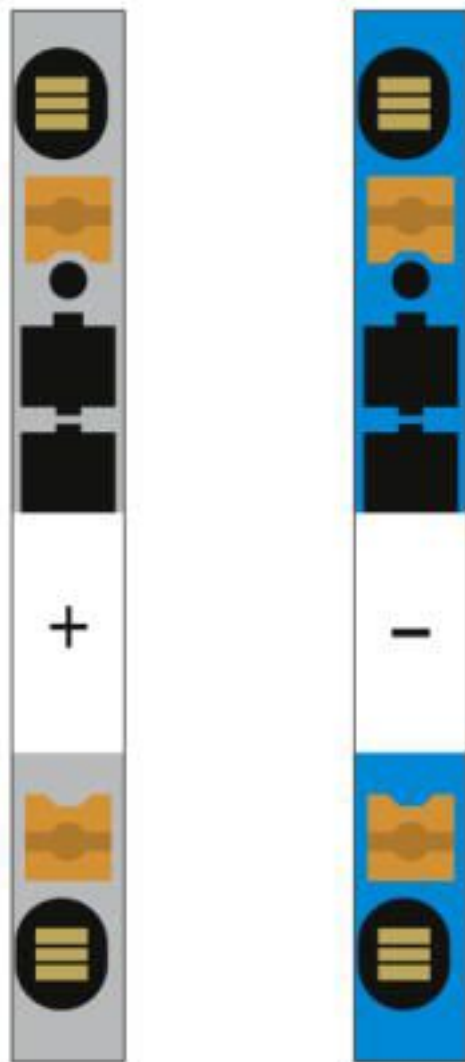

Connection of the PV strings, as well as connection to the inverter

String combiner box (SCB) - SOL-SC-1ST-0-DC-2MPPT-1000SE - 1101176


Connection diagram

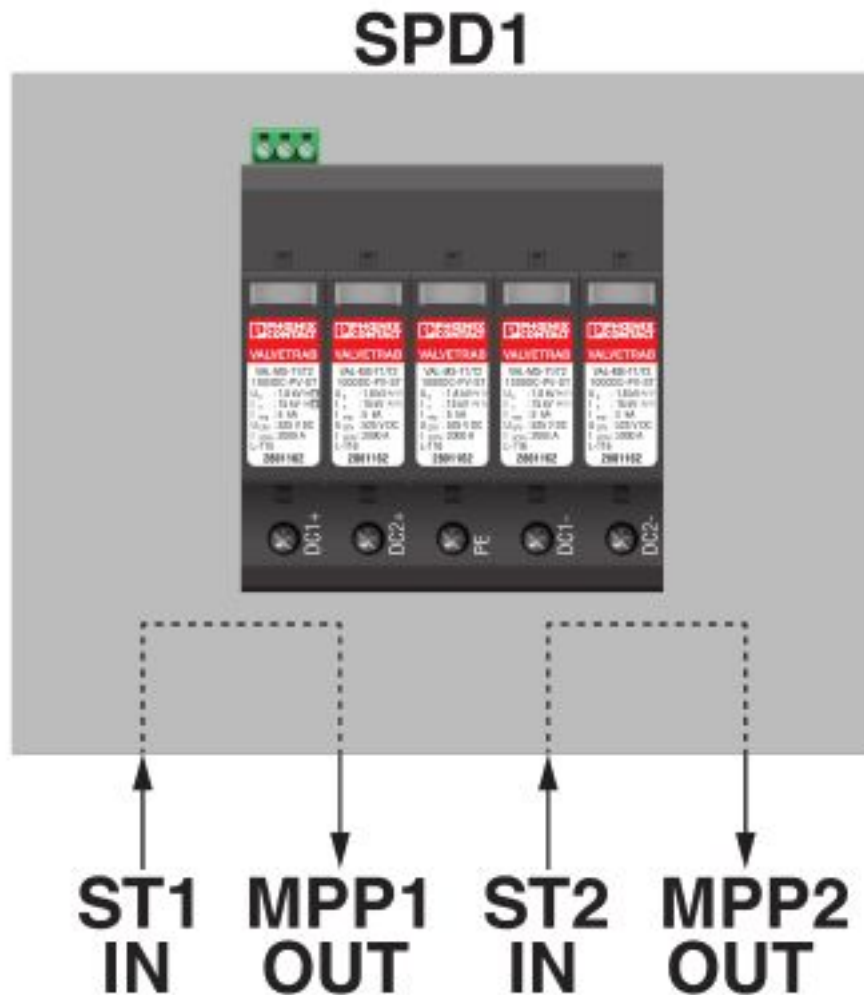

Schematic application drawing

String combiner box (SCB) - SOL-SC-1ST-0- DC-2MPPT-1000SE - 1101176


Dimensional drawing

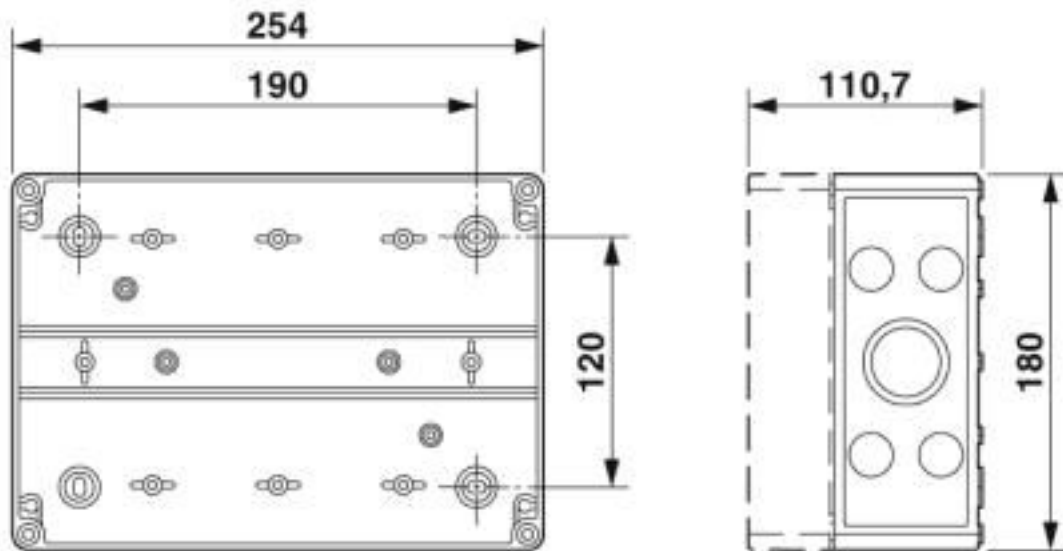

Housing dimensions

String combiner box (SCB) - SOL-SC-1ST-0- DC-2MPPT-1000SE - 1101176

Circuit diagram

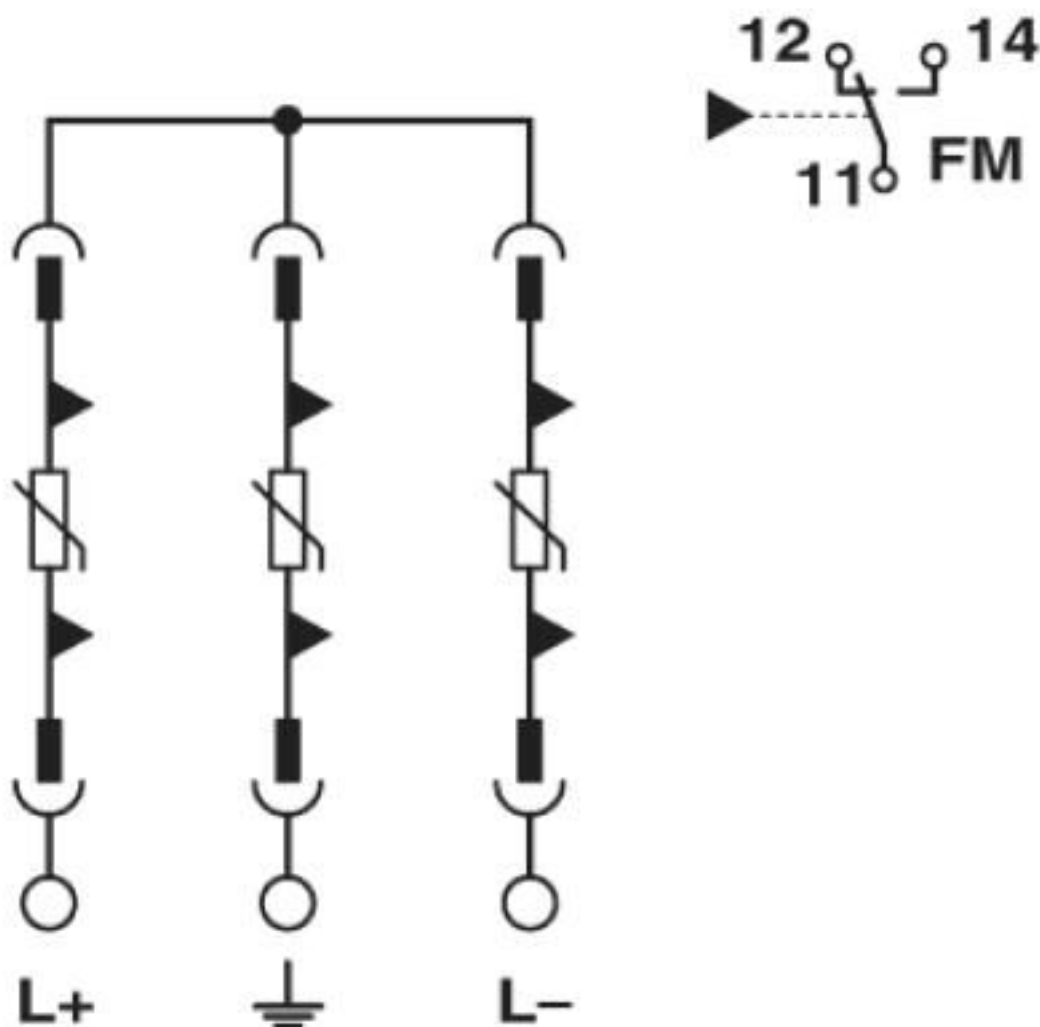

Connection of the remote indication contact on the surge protection

Classifications

eCl@ss

eCl@ss 10.0.1	27142422
eCl@ss 11.0	27142422
eCl@ss 5.1	27371890
eCl@ss 7.0	27142422
eCl@ss 8.0	27142422
eCl@ss 9.0	27142422

String combiner box (SCB) - SOL-SC-1ST-0-DC-2MPPT-1000SE - 1101176

Classifications

ETIM

ETIM 4.0	EC000816
ETIM 5.0	EC000268
ETIM 6.0	EC000268
ETIM 7.0	EC000268

Accessories

Accessories

Photovoltaic connector

Protective cap - PV-C PROTECTION CAP - 1785430



Photovoltaic connector, Range of articles: SUNCLIX, Protective cap, color: black, self-sealing, without interlock, set consisting of: 1 protective cap for connector side and 1 protective cap for coupling side

Connector - PV-CF-S 2,5-6 (+) - 1774674



Photovoltaic connector, Range of articles: PV-CF-S, Connector, housing material: PPE, color: black, number of positions: 1, min. conductor cross section: 2.5 mm², max. conductor cross section: 6 mm², rated current: 27 A, Connection method: Spring-cage, Type of contact: Socket

Connector - PV-CM-S 2,5-6 (-) - 1774687



Photovoltaic connector, Range of articles: PV-CM-S, Connector, housing material: PPE, color: black, number of positions: 1, min. conductor cross section: 2.5 mm², max. conductor cross section: 6 mm², rated current: 27 A, Connection method: Spring-cage, Type of contact: Pin

Connector - PV-CF-S 6-16 (+) - 1790784



Photovoltaic connector, Range of articles: PV-CF-S, Connector, housing material: PPE, color: black, number of positions: 0, min. conductor cross section: 6 mm², max. conductor cross section: 16 mm², rated current: 40 A, Connection method: Spring-cage, Type of contact: Socket

String combiner box (SCB) - SOL-SC-1ST-0-DC-2MPPT-1000SE - 1101176

Accessories

Connector - PV-CM-S 6-16 (-) - 1790797



Photovoltaic connector, Range of articles: PV-CM-S, Connector, housing material: PPE, color: black, number of positions: 0, min. conductor cross section: 6 mm², max. conductor cross section: 16 mm², rated current: 40 A, Connection method: Spring-cage, Type of contact: Pin

Photovoltaic Y-distributor - PV-ED6/Y-120(2+/1-) - 1030649

Photovoltaic connector, Photovoltaic Y-distributor, housing material: PPE, color: black



Photovoltaic Y-distributor - PV-ED6/Y-120(1+/2-) - 1030650

Photovoltaic connector, Photovoltaic Y-distributor, housing material: PPE, color: black



Photovoltaic adapter set - PV-AS-MC4/6-150-MN-SET1 - 1079531



Photovoltaic connector, Photovoltaic adapter set, type: Adapter, color: black, rated current: 35 A, cable length: 150. Connect these connectors only to other connectors of the same type made by the same manufacturer. When making the connections, always observe the specifications regarding nominal voltage and nominal current. The smallest common value is permissible.

Replacement plug

Type 1/2 surge protection plug - VAL-MS-T1/T2 1000DC-PV-ST - 2801162



Replacement plug for PV arrester combinations from the VAL-MS-T1/T2 1000DC-PV-... product range

Tool set

String combiner box (SCB) - SOL-SC-1ST-0-DC-2MPPT-1000SE - 1101176

Accessories

Tool set - TOOL-KIT SOLAR - 1212071



Tool case, equipped with: crimping pliers, pressing dies for MC3, MC4 and SOLARLOK connectors, stripping tool for commercially available solar cables, stripping tool for SUNCLIX, VDE cable cutter, VDE screwdriver: PH1, PH2, 0.6x3.5 and 0.8x4.0 slots.

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>