

Front plate - SI-FP-2R1A-U1A - 1404506

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Front plate with contact inserts, plastic with shroud, 2 x RJ45, 8-pos. metal, CAT5e (socket/socket); 1 x USB (socket/socket) type A



Key Commercial Data

| | |
|--------------|---------------|
| Packing unit | 1 pc |
| GTIN | |
| GTIN | 4046356698481 |

Technical data

Mechanical characteristics

| | |
|-----------------------|---|
| Shielded | yes |
| Degree of protection | IP20 |
| Contact insert design | with 1x RJ45 Socket/socket, snap-in slot locking |
| | with 1x USB A 3.0 Socket/socket, snap-in slot locking |
| Type of note | Assembly instruction: |
| Note | Strain relief USB internal: cable tie |

Ambient conditions

| | |
|---------------------------------|------------------|
| Ambient temperature (operation) | -10 °C ... 60 °C |
| Degree of protection | IP20 |

Material data

| | |
|----------|-------------------|
| Material | PBT (Front plate) |
| Depth | 60 mm |
| Height | 87.5 mm |

Electrical characteristics

| | |
|-----------------------|---|
| Rated voltage (III/3) | max. 42.4 V DC (RJ45, USB A, UL-Rating) |
| Rated current | max. 175 mA (RJ45, UL rating) |

Front plate - SI-FP-2R1A-U1A - 1404506


Technical data

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Dimensional drawing

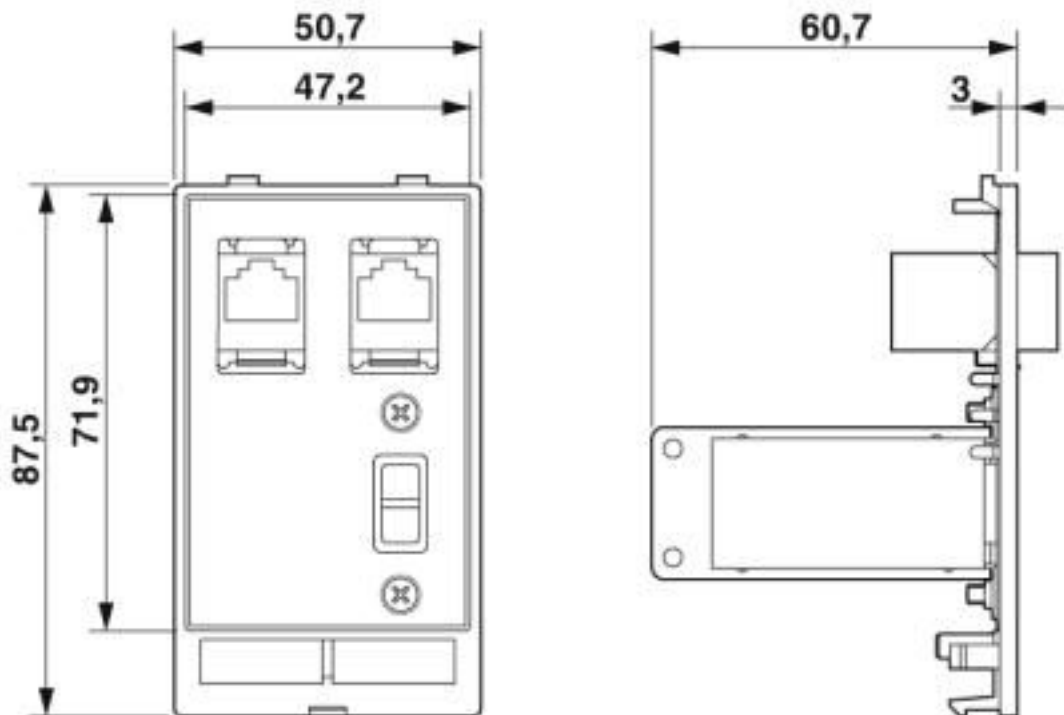

Dimensional drawing

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27182806 |
| eCl@ss 11.0 | 27182806 |
| eCl@ss 4.0 | 27140800 |
| eCl@ss 4.1 | 27140800 |
| eCl@ss 5.0 | 27189200 |
| eCl@ss 5.1 | 27189200 |
| eCl@ss 6.0 | 27189200 |
| eCl@ss 7.0 | 27189217 |
| eCl@ss 8.0 | 27189217 |
| eCl@ss 9.0 | 27189217 |

Front plate - SI-FP-2R1A-U1A - 1404506

Classifications

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000007 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC000456 |
| ETIM 6.0 | EC000456 |
| ETIM 7.0 | EC000456 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31261501 |
| UNSPSC 7.0901 | 31261501 |
| UNSPSC 11 | 31261501 |
| UNSPSC 12.01 | 31261501 |
| UNSPSC 13.2 | 39121302 |
| UNSPSC 18.0 | 39121302 |
| UNSPSC 19.0 | 39121302 |
| UNSPSC 20.0 | 39121302 |
| UNSPSC 21.0 | 39121302 |

Approvals

Approvals


Approvals


UL Recognized / cUL Recognized / EAC / EAC / cULus Recognized

Ex Approvals

Approval details


| | | | |
|---------------|---|---|---------------|
| UL Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 238705 |
|---------------|---|---|---------------|

| | | | |
|----------------|---|---|---------------|
| cUL Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 238705 |
|----------------|---|---|---------------|

| | | |
|-----|---|---------------|
| EAC |  | EAC-Zulassung |
|-----|---|---------------|

Front plate - SI-FP-2R1A-U1A - 1404506

Approvals



Accessories

Accessories

Device marking

Snap-in markers - UCT-EM (20X7) - 0801494



Snap-in markers, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped into marker carrier, lettering field size: 20 x 7 mm, Number of individual labels: 24

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>