

Pin busbar touch-safe, 10 mm<sup>2</sup> 3-phase, 214 mm long can be cut, with end caps



Figure similar

Model	
product brand name	SENTRON
product designation	Pin busbar
design of the product	10 mm <sup>2</sup> , 3PH L214 mm
General technical data	
phase number	3
cross-section	10 mm <sup>2</sup>
Current	
continuous current / rated value	63 A
Product details	
product feature / insulated	Yes
Connections	
type of electrical connection	Pin
Mechanical Design	
width	18 mm

length	214 mm
net weight	87.63 g

### Certificates

General Product Approval	Declaration of Conformity	other
--------------------------	---------------------------	-------

[Miscellaneous](#)

[Miscellaneous](#)



### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3738>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3738>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3738](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3738)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

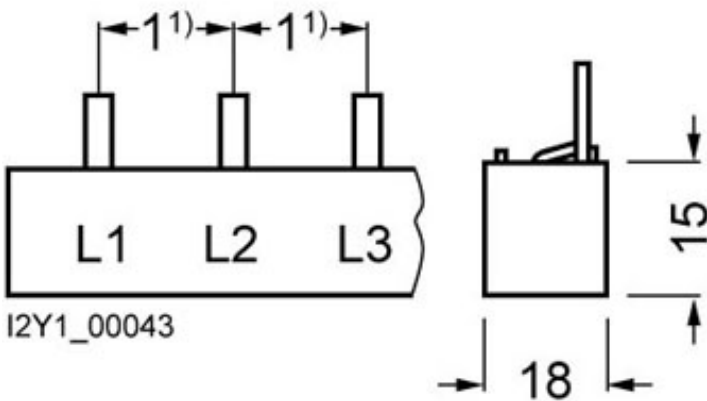

1) Pin spacings in MW (Modular widths, 1 MW = 18 mm).

